



福建南安闽文消防科技有限公司

FUJIAN NAN'AN MINWEN FIRE PROTECTION TECHNOLOGY CO., LTD.

地址：福建省泉州市南安市溪美街道贵峰村下角13号

ADD:NO. 13, XIAJIAO, GUIFENG VILLAGE, XIMEI SUBDISTRICT,
NAN'AN CITY, QUANZHOU CITY, FUJIAN PROVINCE

邮编：(P.C)：362300

电话：(TEL):+86 186 4996 0466

+86 135 5905 0119

邮箱：971860232@QQ.COM



MIN WEN FIRE PROTECTION 闽文消防

福建南安闽文消防科技有限公司



公司简介 / INTRODUCTION

福建闽文消防器材有限公司位于福建泉州南安市，是一家集研发、生产、销售、服务于一体的专业消防器材企业。公司主营消防水带、消防水枪、消火栓、接口、卷盘、干粉灭火器、二氧化碳灭火器、水基型灭火器、消防阀门、管件接头及船舶消防配件等全系列产品，具备齐全的国内外认证资质。产品不仅覆盖全国市场，更远销欧洲、中东、东南亚、非洲等地区，深耕外贸业务多年。公司始终以质量为核心、诚信为根本，凭借稳定品质与专业服务，为海内外客户提供一站式消防产品供应解决方案。

LOCATED IN NAN'AN, QUANZHOU, FUJIAN PROVINCE, FUJIAN MINWEN FIRE EQUIPMENT CO., LTD. IS A PROFESSIONAL ENTERPRISE INTEGRATING R&D, PRODUCTION, SALES AND SERVICE. WE MAINLY PRODUCE A FULL RANGE OF PRODUCTS INCLUDING FIRE HOSES, FIRE NOZZLES, FIRE HYDRANTS, COUPLINGS, HOSE REELS, DRY POWDER FIRE EXTINGUISHERS, CO₂ FIRE EXTINGUISHERS, WATER-BASED FIRE EXTINGUISHERS, FIRE VALVES, PIPE FITTINGS, JOINTS AND MARINE FIRE FIGHTING ACCESSORIES, WITH COMPLETE DOMESTIC AND INTERNATIONAL CERTIFICATIONS. OUR PRODUCTS ARE SOLD ALL OVER CHINA AND EXPORTED TO EUROPE, THE MIDDLE EAST, SOUTHEAST ASIA, AFRICA AND OTHER REGIONS WITH YEARS OF EXPERIENCE IN FOREIGN TRADE. ADHERING TO QUALITY-ORIENTED AND INTEGRITY-BASED PRINCIPLES, WE PROVIDE ONE-STOP FIRE EQUIPMENT SUPPLY SOLUTIONS FOR GLOBAL CUSTOMERS WITH STABLE QUALITY AND PROFESSIONAL SERVICES.

企业文化

核心价值观

以质量为生命，以用户为中心，以创新促发展，以合作达共赢

企业使命

为全球消防用户提供安全可靠的产品

企业精神

艰苦奋斗、开拓进取、自强不息，厚德载物

企业愿景

立足消防行业做一个健康发展的有生命力的现代化企业



来南安 会成功

目录

- 01系列 GATE VALVE
- 02系列 BALL VALVE
- 03系列 GLOBE VALVE
- 04系列 CHECK VALVE
- 05系列 OTHERS VALVE
- 06系列 PRESSURE REDUCING VALVE
- 07系列 FIRE HYDRANT VALVE
- 08系列 HYDRAULIC NOZZLE
- 09系列 HOSE COUPLING
- 10系列 FITTING , FLANGE AND SPANNER
- 11系列 FIRE WATERWAY
- 12系列 FIRE HOSE REEL
- 13系列 WATER DIVIDER AND SHORE CONNECTIONS
- 14系列 PILLAR HYDRANT
- 15系列 CO2 FIRE EXTINGUISHER VALVE
- 16系列 POWDER FIRE EXTINGUISHER VALVE
- 17系列 SPRINKLER
- 18系列 EXTINGUISHER NOZZLE AND HOSE HORN
- 19系列 BRACKETS
- 20-27系列 FIRE EXTINGUISHER
- 28系列 MOBILE FOAM TROLLEY
- 29系列 KITCHEN FIRE PROTECTION ACCESSORIES



08-056-00



Product Number	Size	Working pressure	Effective Throw distance (m)	Jet flow rate (l/min)	Spine flow rate (l/min)	Standard
08-056B-00(12)	2"BSP	6Bar	32.4	222	576	EN15182-1 EN15182-2
08-056A-00(16)	2"BSP	6Bar	35.1	326	570	
08-056-00(19)	2"BSP	6Bar	38.7	366	588	



08-005M-00



08-005H-00

Product Number	Size	Working pressure	Effective Throw distance (m)	Jet flow rate (l/min)	Spine flow rate (l/min)	Standard
08-005M19-00	F 455"10 TPI	6Bar	38.7	513	986	EN15182-1 EN15182-2
08-005M16-00	F 455"10 TPI	6Bar	35.1	420	980	
08-005M12-00	F 455"10 TPI	6Bar	32	236	978	
08-005H19-00	F 445"12 TPI	6Bar	33.3	416	762	
08-005H16-00	F 445"12 TPI	6Bar	31.5	396	750	
08-005H12-00	F 445"12 TPI	6Bar	27.9	300	738	
08-005K19-00	F 436"12 TPI	6Bar	27	270	462	
08-005K16-00	F 436"12 TPI	6Bar	27.9	258	462	
08-005K12-00	F 436"12 TPI	6Bar	29	204	456	



08-005K-00





Product Number	12-003G-00
Type	Manual Swing
Hose	25MM*30M, EN 694
Nozzle	Brass, 6MM Jet Stream
Material	25MM Brass
Working Pressure	12 Bar
Standard	EN 671-1:2012
Mounting	Nozzle holder included
Dimension	575*550*280
Total Mass	21 KG
Road Wheel Thickness	1 MM
Thickness of hose	3.5 MM

12-003G-00



25-WD-W9



25-WD-F9



25-WD-C2



25-WD-C5



Product Number	13-002AV-00
Body Material	Ductile Iron
Valve Type	Oblique, Globe Pattern
Inlet Connection	4 x 2.5" Instantaneous BS 336
Outlet Connection	Flanged BS 4504-2
Test Pressure	20 BAR
Flow Rate	10 BAR
Standard	BS 5041-3(1975)
Blow Cap	Rubber with S/S Chain
Weight	31kg



22-WD-P2



22-WD-P3



22-WD-P4



22-WD-P6



22-WD-P9

Product Number	22-WD-W9	22-WD-F9	22-WD-C2	22-WD-C5
Capacity	9LTR	9LTR	2KG	5KG
Extinguishing Agent	Water	6% foam	Carbon Dioxide	Carbon Dioxide
Fire Rating	21A	21A 183B	21B	70B
Working Pressure	12Bar	12Bar	55Bar	55Bar
Testing Pressure	25Bar	25Bar	250Bar	250Bar
Operating Temp	5°C to +60°C	5°C to +60°C	-30°Cto +60°C	-30°Cto +60°C
Propellant	Nitrogen	Nitrogen	Carbon Dioxide	Carbon Dioxide
Pressure Indicator	Pressure Gauge	Pressure Gauge	/	/
Standards	SS EN3-7,SS EN3-8	SS EN3-7,SS EN3-8	SS EN3-7,SS EN3-9	SS EN3-7,SS EN3-9
Mounting	Wall bracket induded	Wall bracket included	Wall bracket included	Wall bracket included
Dimension(mm)	184*200*620	184*200*620	104* 180*570	136*200*760
Weight	13.6 KG	13.6 KG	6.2KG	13.7KG

Product Number	22-WD-P2	22-WD-P3	22-WD-P4	22-WD-P6	22-WD-P9
Capacity	2KG	3KG	4KG	6KG	9KG
Extinguishing Agent	ABC Powder EN615	ABC Powder EN615	ABC Powder EN615	ABC Powder EN615	ABC Powder EN615
Fire Rating	13A 70B	21A 70B	27A 113B	43A 183B	55A 233B
Working Pressure	14 Bar	14 Bar	14 Bar	14 Bar	14 Bar
Testing Pressure	25 Bar	25 Bar	25 Bar	25 Bar	25 Bar
Operating Temp	-30°C to +60°C	-30°Cto +60°C	-30°C to +60°C	-30°Cto+60°C	-30°C to +60°C
Propellant	Nitrogen	Nitrogen	Nitrogen	Nitrogen	Nitrogen
Pressure Indicator	Pressure Gauge	Pressure Gauge	Pressure Gauge	Pressure Gauge	Pressure Gauge
Standards	SS EN3-7,SS EN3-8	SS EN3-7,SS EN3-8	SS EN3-7,SS EN3-8	SS EN3-7,SS EN3-8	SS EN3-7,SS EN3-8
Mounting	Wall bracket induded	Wall bracket included	Wall bracket included	Wall bracket included	Wall bracket included
Dimension(mm)	110*125*400	130*160*430	150*170*490	150*180*540	184*200*590
Weight	3.2 KG	4.9KG	6.4KG	8.7KG	12.7KG



07-002A1-00



Product Number	07-002A1-00
Body Material	Gunmetal (LG2)
Valve Type	Bid-Nose, Globe Pattern
Inter Connection	Threaded 2.5"BSPT Male
Outlet Connection	2.5" Instantaneous BS 336
Test Pressure	≥30 BAR @ 2 MINS
Flow Rate	≥8.5 LPS @ 4.7-20 BAR
Standards	BS 5041-1 (1987)
Blow Cap	Plastic with S/S Chain
Weight	9.2kg



07-002QT-00



Product Number	Inlet	Outlet
07-002QT-00	2.5"BSPT	2.5"BS336



07-006G2-00



Product Number	07-006G2-00
Body Material	Gunmetal (LG2)
Valve Type	Oblique, Globe Pattern
Inter Connection	Threaded 2.5"BSPT Male
Outlet Connection	2.5" Instantaneous BS 336
Test Pressure	≥ 22.5 BAR @2 MINS
Flow Rate	≥8.5 LPS @ 4.7 BAR
Standards	BS 5041-1(1987)
Blow Cap	Plastic with S/S Chain
Weight	4.5kg



07-006QT-00



Product Number	Inlet	Outlet
07-006QT-00	2.5"BSPT	2.5"BS336



09-017A3-00A



09-017C3-00A



Product Number	Inlet	Outlet
09-017A3-00A	2.5"BS336	Φ63.7
09-017C3-00A	2.5"BS336	Φ38.3



13-001AV-00



Product Number	13-001AV-00
Body Material	Ductile Iron
Valve Type	Oblique, Globe Pattern
Inter Connection	2"2.5" Instantaneous BS 336
Outlet Connection	Flanged BS 4504-2
Test Pressure	20 BAR
Flow Rate	10 BAR
Standards	BS 5041-3(1975)
Blow Cap	Rubber with S/S Chain
Weight	13.6kg



09-018QT1-00



09-018QT4-00



Product Number	Inlet	Outlet
09-018QT1-00	2.5"BS336	Φ63.7
09-018QT4-00	2.5"BS336	Φ38.3



08-013B-00



08-039B-00



08-044C-00



12-001A1-00

Product Number	Type	Hose Diameter&length	Dimension	Nozzle
12-001A-00	Manual&Swinging	25mmx30m	620x550x240	08-013B-00
12-001A1-00	Manual&Swinging	25mmx30m	620x550x240	08-039B-00
12-001A2-00	Manual&Swinging	25mmx30m	620x550x240	08-044C-00



08-013B-00



08-039B-00



08-044C-00



12-003A-00

312-003C2-00

Product Number	Type	Hose Diameter&length	Dimension	Nozzle
12-003A-00	Manual&Swinging	25mmx30m	570x550x280	08-013B-00
12-003A1-00	Manual&Swinging	25mmx30m	570x550x280	08-039B-00
12-003A2-00	Manual&Swinging	25mmx30m	570x550x280	08-044C-00
12-003B-00	Manual&Swinging	25mmx30m	570x550x280	08-013B-00
12-003B1-00	Manual&Swinging	25mmx30m	570x550x280	08-039B-00
12-003B2-00	Manual&Swinging	25mmx30m	570x550x280	08-044C-00
12-003C-00	Manual&Swinging	25mmx30m	570x550x280	08-013B-00
12-003C1-00	Manual&Swinging	25mmx30m	570x550x280	08-039B-00
12-003C2-00	Manual&Swinging	25mmx30m	570x550x280	08-044C-00



ML230



ML500



ML750



ML950



MQ500



MH500



MHD400

Product Number	Model	Unit	Pressure	Flow Rate (LPM)	F Distance	Weight
08-200MD-00	ML230	F 1"NH	6Bar	50-100-150-230	26M	1Kg
08-200MB-00	ML500	2"BSP	6Bar	115-230-360-475	32M	1.8Kg
08-200MG-00	ML750	2.5"BSP	6Bar	360-475-550-750	35M	2.8Kg
08-200MC-00	ML950	2.5"BSP	6Bar	360-475-550-750-950	37M	2.8Kg
08-200MQ-00	MQ500	2"BSP	6Bar	115-230-360-475	32M	3.9Kg
08-200MH-00	MH500	2"BSP	6Bar	115-230-360-475	32M	3.9Kg
08-209-00	MHD400	2"BSP	6Bar	0-400	30M	3.5Kg



01-002-00

01-003-00



01-001-00

01-004-00

01-010-00



01-001C2-00

13-001-01A-00

01-001C-00



01-039-00

01-039A-00

01-039B-00

Product Number	DN	SIZE
01-002A-00	DN15	1/2"
01-002B-00	DN20	3/4"
01-002C-00	DN25	1"
01-002D-00	DN32	1 1/4"
01-002E-00	DN40	1 1/2"
01-002F-00	DN50	2"
01-002G-00	DN65	2 1/2"
01-002H-00	DN80	3"
01-002J-00	DN100	4"
01-003A-00	DN15	1/2"
01-003B-00	DN20	3/4"
01-003C-00	DN25	1"
01-003D-00	DN32	1 1/4"
01-003E-00	DN40	1 1/2"
01-003F-00	DN50	2"
01-003G-00	DN65	2 1/2"
01-003H-00	DN80	3"
01-003J-00	DN100	4"

Product Number	DN	SIZE
01-001A-00	DN15	1/2"
01-001B-00	DN20	3/4"
01-001C-00	DN25	1"
01-001D-00	DN32	1 1/4"
01-001E-00	DN40	1 1/2"
01-001F-00	DN50	2"
01-001G-00	DN65	2 1/2"
01-001H-00	DN80	3"
01-001J-00	DN100	4"
01-004A-00	DN15	1/2"
01-004B-00	DN20	3/4"
01-004C-00	DN25	1"
01-004D-00	DN32	1 1/4"
01-004E-00	DN40	1 1/2"
01-004F-00	DN50	2"
01-004G-00	DN65	2 1/2"
01-004H-00	DN80	3"
01-004J-00	DN100	4"
01-010A-00	DN15	1/2"
01-010B-00	DN20	3/4"
01-010C-00	DN25	1"
01-010D-00	DN32	1 1/4"
01-010E-00	DN40	1 1/2"
01-010F-00	DN50	2"
01-010G-00	DN65	2 1/2"
01-010H-00	DN80	3"
01-010J-00	DN100	4"

Product Number	DN	SIZE
01-001C2-00	DN25	1"
13-001-01A-00	DN25	1"
01-001C-00WOG	DN25	1"

Product Number	Inlet	Outlet
01-039-00	2.5"BSPT	2.5"BS336
01-039A-00	2.5"BS4504	2.5"BS336
01-039B-00	2"BS4504	2.5"BS336



02-001-00

02-014(15)-00



02-004-00

02-005-00



02-007-00

02-016-00



02-030-00

Product Number	DN	SIZE
02-001A-00	DN15	1/2"
02-001B-00	DN20	3/4"
02-001C-00	DN25	1"
02-001D-00	DN32	1 1/4"
02-001E-00	DN40	1 1/2"
02-001F-00	DN50	2"
02-001G-00	DN65	2 1/2"
02-001H-00	DN80	3"
02-001J-00	DN100	4"
02-014A-00	DN15	1/2"
02-014B-00	DN20	3/4"
02-014C-00	DN25	1"
02-014D-00	DN32	1 1/4"
02-014E-00	DN40	1 1/2"
02-014F-00	DN50	2"
02-014G-00	DN65	2 1/2"
02-014H-00	DN80	3"
02-014J-00	DN100	4"
02-014L-00	DN150	6"
02-014M-00	DN200	8"

Product Number	DN	SIZE
02-004A-00	DN15	1/2"
02-004B-00	DN20	3/4"
02-004C-00	DN25	1"
02-004D-00	DN32	1 1/4"
02-004E-00	DN40	1 1/2"
02-004F-00	DN50	2"
02-004G-00	DN65	2 1/2"
02-004H-00	DN80	3"
02-004J-00	DN100	4"
02-005A-00	DN15	1/2"
02-005B-00	DN20	3/4"
02-005C-00	DN25	1"
02-005D-00	DN32	1 1/4"
02-005E-00	DN40	1 1/2"
02-005F-00	DN50	2"
02-005G-00	DN65	2 1/2"
02-005H-00	DN80	3"
02-005J-00	DN100	4"
02-007A-00	DN15	1/2"
02-007B-00	DN20	3/4"
02-007C-00	DN25	1"
02-007D-00	DN32	1 1/4"
02-007E-00	DN40	1 1/2"
02-007F-00	DN50	2"
02-007G-00	DN65	2 1/2"
02-007H-00	DN80	3"
02-007J-00	DN100	4"
02-016A-00	DN15	1/2"
02-016B-00	DN20	3/4"
02-016C-00	DN25	1"
02-016D-00	DN32	1 1/4"
02-016E-00	DN40	1 1/2"
02-016F-00	DN50	2"
02-016G-00	DN65	2 1/2"
02-016H-00	DN80	3"
02-016J-00	DN100	4"

Product Number	DN	SIZE
02-030A-00	DN15	1/2"
02-030B-00	DN20	3/4"
02-030C-00	DN25	1"
02-030D-00	DN32	1 1/4"
02-030E-00	DN40	1 1/2"
02-030F-00	DN50	2"
02-030G-00	DN65	2 1/2"
02-030H-00	DN80	3"
02-030J-00	DN100	4"



01-050-00



03-050-00



04-050-00



08-050-00



03-002-00



03-003-00



03-001-00



03-014-00

Product Number	DN	SIZE
01-050A-00	DN15	1/2"
01-050B-00	DN20	3/4"
01-050C-00	DN25	1"
01-050D-00	DN32	1 1/4"
01-050E-00	DN40	1 1/2"
01-050F-00	DN50	2"
01-050G-00	DN65	2 1/2"
01-050H-00	DN80	3"
01-050J-00	DN100	4"
01-050K-00	DN125	5"
01-050L-00	DN150	6"
01-050M-00	DN200	8"
01-050N-00	DN250	10"
01-050O-00	DN300	12"
03-050A-00	DN15	1/2"
03-050B-00	DN20	3/4"
03-050C-00	DN25	1"
03-050D-00	DN32	1 1/4"
03-050E-00	DN40	1 1/2"
03-050F-00	DN50	2"
03-050G-00	DN65	2 1/2"
03-050H-00	DN80	3"
03-050J-00	DN100	4"
03-050K-00	DN125	5"
03-050L-00	DN150	6"
04-050A-00	DN40	1 1/2"
04-050B-00	DN50	2"
04-050C-00	DN65	2 1/2"
04-050D-00	DN80	3"
04-050E-00	DN100	4"
04-050F-00	DN125	5"
04-050G-00	DN150	6"
08-050A-00	DN32	1 1/4"
08-050B-00	DN40	1 1/2"
08-050C-00	DN50	2"
08-050D-00	DN65	2 1/2"
08-050E-00	DN80	3"
08-050F-00	DN100	4"
08-050G-00	DN125	5"
08-050H-00	DN150	6"

Product Number	DN	SIZE
03-002A-00	DN15	1/2"
03-002B-00	DN20	3/4"
03-002C-00	DN25	1"
03-002D-00	DN32	1 1/4"
03-002E-00	DN40	1 1/2"
03-002F-00	DN50	2"
03-002G-00	DN65	2 1/2"
03-002H-00	DN80	3"
03-002J-00	DN100	4"
03-003A-00	DN15	1/2"
03-003B-00	DN20	3/4"
03-003C-00	DN25	1"
03-003D-00	DN32	1 1/4"
03-003E-00	DN40	1 1/2"
03-003F-00	DN50	2"
03-003G-00	DN65	2 1/2"
03-003H-00	DN80	3"
03-003J-00	DN100	4"

Product Number	DN	SIZE
03-001A-00	DN15	1/2"
03-001B-00	DN20	3/4"
03-001C-00	DN25	1"
03-001D-00	DN32	1 1/4"
03-001E-00	DN40	1 1/2"
03-001F-00	DN50	2"
03-001G-00	DN65	2 1/2"
03-001H-00	DN80	3"
03-001J-00	DN100	4"
03-014A-00	DN15	1/2"
03-014B-00	DN20	3/4"
03-014C-00	DN25	1"
03-014D-00	DN32	1 1/4"
03-014E-00	DN40	1 1/2"
03-014F-00	DN50	2"
03-014G-00	DN65	2 1/2"
03-014H-00	DN80	3"
03-014J-00	DN100	4"



03-025-00



04-002-00



04-003-00



04-001-00



05-020-0C

Product Number	DN	SIZE
03-025A-00	DN15	1/2"
03-025B-00	DN20	3/4"
03-025C-00	DN25	1"
03-025D-00	DN32	1 1/4"
03-025E-00	DN40	1 1/2"
03-025F-00	DN50	2"

Product Number	DN	SIZE
04-002A-00	DN15	1/2"
04-002B-00	DN20	3/4"
04-002C-00	DN25	1"
04-002D-00	DN32	1 1/4"
04-002E-00	DN40	1 1/2"
04-002F-00	DN50	2"
04-002G-00	DN65	2 1/2"
04-002H-00	DN80	3"
04-002J-00	DN100	4"
04-003A-00	DN15	1/2"
04-003B-00	DN20	3/4"
04-003C-00	DN25	1"
04-003D-00	DN32	1 1/4"
04-003E-00	DN40	1 1/2"
04-003F-00	DN50	2"
04-003G-00	DN65	2 1/2"
04-003H-00	DN80	3"
04-003J-00	DN100	4"

Product Number	DN	SIZE
04-001A-00	DN15	1/2"
04-001B-00	DN20	3/4"
04-001C-00	DN25	1"
04-001D-00	DN32	1 1/4"
04-001E-00	DN40	1 1/2"
04-001F-00	DN50	2"
04-001G-00	DN65	2 1/2"
04-001H-00	DN80	3"
04-001J-00	DN100	4"

Product Number	Inlet
05-020A-00	1/2 "
05-020B-00	3/4 "
05-020C-00	1 "



04-010-00



04-016-00



04-019-00



04-020-00



05-005-00



05-007-00



05-017-00 (黄)

Product Number	DN	SIZE
04-010A-00	DN15	1/2"
04-010B-00	DN20	3/4"
04-010C-00	DN25	1
04-010D-00	DN32	1 1/4"
04-010E-00	DN40	1 1/2"
04-010F-00	DN50	2"

Product Number	DN	SIZE
04-016A-00	DN15	1/2"
04-016B-00	DN20	3/4"
04-016C-00	DN25	1
04-016D-00	DN32	1 1/4"
04-016E-00	DN40	1 1/2"
04-016F-00	DN50	2"
04-016G-00	DN65	2 1/2"
04-016H-00	DN80	3"
04-016J-00	DN100	4"
04-019A-00	DN15	1/2"
04-019B-00	DN20	3/4"
04-019C-00	DN25	1
04-019D-00	DN32	1 1/4"
04-019E-00	DN40	1 1/2"
04-019F-00	DN50	2"
04-019G-00	DN65	2 1/2"
04-019H-00	DN80	3"
04-019J-00	DN100	4"
04-020A-00	DN15	1/2"
04-020B-00	DN20	3/4"
04-020C-00	DN25	1
04-020D-00	DN32	1 1/4"
04-020E-00	DN40	1 1/2"
04-020F-00	DN50	2"
04-020G-00	DN65	2 1/2"
04-020H-00	DN80	3"
04-020J-00	DN100	4"

Product Number	DN
05-005A-00	DN15
05-005B-00	DN20
05-005C-00	DN25

Product Number	DN	SIZE
05-007A-00	DN15	1/2"
05-007B-00	DN20	3/4"
05-007C-00	DN25	1
05-007D-00	DN32	1 1/4"
05-007E-00	DN40	1 1/2"
05-007F-00	DN50	2"

Product Number	DN	SIZE
05-017A-00	DN15	1/2"
05-017B-00	DN20	3/4"
05-017C-00	DN25	1
05-017D-00	DN32	1 1/4"
05-017E-00	DN40	1 1/2"
05-017F-00	DN50	2"



06-002-00



06-005-00



06-001-00



06-006-00



06-007-00



06-017-00

Product Number	DN	SIZE
06-002A-00	DN15	1/2"
06-002B-00	DN20	3/4"
06-002C-00	DN25	1
06-002D-00	DN32	1 1/4"
06-002E-00	DN40	1 1/2"
06-002F-00	DN50	2"
06-005A-00	DN15	1/2"
06-005B-00	DN20	3/4"
06-005C-00	DN25	1
06-005D-00	DN32	1 1/4"
06-005E-00	DN40	1 1/2"
06-005F-00	DN50	2"

Product Number	DN	SIZE
06-001A-00	DN15	1/2"
06-001B-00	DN20	3/4"
06-001C-00	DN25	1
06-001D-00	DN32	1 1/4"
06-001E-00	DN40	1 1/2"
06-001F-00	DN50	2"
06-006A-00	DN15	1/2"
06-006B-00	DN20	3/4"
06-006C-00	DN25	1
06-006D-00	DN32	1 1/4"
06-006E-00	DN40	1 1/2"
06-006F-00	DN50	2"
06-007A-00	DN15	1/2"
06-007B-00	DN20	3/4"
06-007C-00	DN25	1
06-007D-00	DN32	1 1/4"
06-007E-00	DN40	1 1/2"
06-007F-00	DN50	2"

Product Number	DN	SIZE
06-017A-00	DN15	1/2"
06-017B-00	DN20	3/4"
06-017C-00	DN25	1
06-017D-00	DN32	1 1/4"
06-017E-00	DN40	1 1/2"
06-017F-00	DN50	2"



07-001-00



07-002-00

Product Number	Inlet	Outlet
07-001-00	(ϕ 65) 2.5" BS4504	2.5" BS336
07-002-00	2.5" BSP	2.5" BS336
07-002A-00	2.5" BSPT	2.5" BS336
07-002A1-00	2.5"BSPT	2.5"BS336
07-002GC-00S	DN65	2.5"BSP(2.5"storz)
07-002AV-00	2.5"BSPT	2.5"BS336
07-002E-00	2"BSP	2"BSP



07-002A1-00



07-002GC-00S



07-002AV-00



07-002E-00

Product Number	Inlet	Outlet
07-003-00	(ϕ 65) 2" BS4504	2.5" BS336
07-004-00	2.5" BSP	2.5" BS336
07-082-00	(ϕ 65) 3" ANSI FF	2.5" BS336
07-082A-00	2.5"BSP	2.5" BS336



07-003-00



07-004-00



07-082-00



07-006-00



07-006FK-00

Product Number	Inlet	Outlet
07-006-00	2.5 "BSP	2.5"BS336
07-010-00	(ϕ 65)2" BS4504	2.5"BS336
07-010A-00	(ϕ 65) 2.5" BS4504	2.5"BS336
07-006FK-00	2.5"BSPT	2.5"BS336
07-006GC-00	DN65	2.5"BS336



07-010-00



07-006GC-00



07-008-00



07-009-00

Product Number	Inlet	Outlet
07-008-00	(ϕ 65) 2.5" BS4504	2.5 "BS336
07-009-00	2.5" BSPT	2.5 "BS336



07-011-00



07-012-00

Product Number	Inlet	Outlet
07-011-00	2.5" BSP	2.5" BS336
07-012-00	(ϕ 65) 2.5" BS4504	2.5" BS336



07-007-00



07-007A-00



07-007B-00

Product Number	Inlet	Outlet
07-007-00	(ϕ 65) 2.5" BS4504	2.5 "BSP
07-007A-00	(ϕ 65)2.5 "JIS10K	2.5 "BSP
07-007B-00	(ϕ 65)2.5 "ANSI	2.5 "BSP



07-006CY-00



07-019-00

Product Number	Inlet	Outlet
07-019-00	2.5" BSP	2.5"BS336
07-006CY-00	2.5" BSP	2.5"BS336



Product Number	Inlet	Outlet
07-005C1-00	1 "BSP	M34X3
07-005C2-00	1 "BSP	¢25
07-005C3-00	1 "BSP	¢25



Product Number	Inlet	Outlet
07-005E-00	1.5 "BSP	1.5 "NH
07-005E2-00	1.5 "BSP	¢25
07-035-00	1.5 "BSP	1.5 "BSP



Product Number	Inlet	Outlet	INPS
07-005F1-00	2 "BSP	2 "BSP(2" storz)	
07-005F2-00	2 "BSP	2 "BSP(2" storz)	
07-005F5-00	2 "NPT	2 "NPT	
07-005F-00	2"BSPT	2"BSP	756084
07-005GC-00	DN65	2.5"BSP	
07-005GC1-00	DN80	3"BSP	
07-005GC2-00	DN50	2"BSP	



Product Number	Inlet	Outlet
07-005-00	2 "BSP	2 "BSP
07-005G-00	2.5 "BSP	2.5 "BSP
07-005G6-00	2.5"BSP	2.5"NH



Product Number	Inlet	Outlet
07-021B-00	F3/4BSP	3/4BSP
07-021C1-00	F1 "BSP	¢25
07-021E-00	F1.5 "BSP	1.5 "BSP



Product Number	Inlet	Outlet
07-021F-00	F2 "BSP	2 "BSP
07-021F1-00	F2 "BSP	2 "BSP
07-021G-00	F2.5 "BSP	2.5 "BSP



Product Number	Inlet	Outlet
07-020-00	F2 "BSP	2 "BSP
07-022-00	F13/4 "BSP	13/4 "BSP



Product Number	Inlet	Outlet
07-025-00	1.5"BSP	¢25



07-016-00

07-017-00

Product Number	Inlet	Outlet
07-016-00	F2.5" NPT	2.5" NH
07-017-00	F1.5" NPT	1.5" NH



07-031-00

07-031A-00 07-031E-00

Product Number	Inlet	Outlet
07-031-00	F1.5 "NPT	F1.5 "NPT
07-031A-00	F1.5 "NPT	1.5 "NH
07-031B-00	F1.5 "NPT	F1.5 "NPT
07-031C-00	F1.5 "NPT	F1.5 "NH
07-031E-00	F1.5 "NPT	1.5 "NH
07-033-00	F2"NPT	F2"NPT
07-033A-00	F2"NPT	2"NPT
07-033B-00	F2"BSP	2"BSP



07-031B-00

07-031C-00



07-032-00

07-032A-00 07-032E-00

Product Number	Inlet	Outlet
07-032-00	F2.5 "NPT	F2.5 "NPT
07-032A-00	F2.5 "NPT	F2.5 "NH
07-032B-00	F2.5 "NPT	F2.5 "BS336
07-032C-00	F2.5 "NPT	2.5 "NH
07-032E-00	F2.5 "NPT	2.5 "NH



07-032B-00

07-032C-00



07-033-00



07-034-00

07-034B-00

Product Number	Inlet	Outlet
07-033-00	F1.5"NPT	F1.5"NPT

Product Number	Inlet	Outlet
07-034-00	3 "BSP	F2.5 "BS336
07-034B-00	3 "BSP	F2.5 "BS336



07-026-00

07-027-00

Product Number	Inlet	Outlet
07-026-00	(ø 50)2 "ANSI	F2 "BSP
07-027-00	(ø 50)2 "ANSI	F2 "BSP



07-026

07-066

Product Number	Inlet	Outlet	NPS
07-046J-00	1.5"BS4504	1.5"BSP	756085 NOHOLES
07-046A-00	1.5"ANSI	1.5"BSP	
07-046M-00	1.5"JIS10K	1.5"BSP	
07-046S-00	1.5"DIN	1.5"BSP	
07-026J-00	2"BS4504	2"BSP	756099 NOHOLES
07-026A-00	2"ANSI	2"BSP	
07-026S-00	2"DIN	2"BSP	
07-026M-00	2"JIS10K	2"BSP	
07-066AJ-00	2.5"BS4504	2.5"BSP	756100 NOHOLES
07-066AM-00	2.5"JIS10K	2.5"BSP	
07-066AA-00	2.5"ANSI	2.5"BSP	
07-066AS-00	2.5"DIN	2.5"BSP	



07-037-00

07-067-00

Product Number	Inlet	Outlet	NO HOLES
07-067CJ-00	1.5"BS4504	1.5"BSP	756059
07-067CA-00	1.5"ANSI	1.5"BSP	
07-067CM-00	1.5"JIS10K	1.5"BSP	
07-067CS-00	1.5"DIN	1.5"BSP	
07-067BJ-00	2"BS4504	2"BSP	756060
07-067BA-00	2"ANSI	2"BSP	
07-067BS-00	2"DIN	2"BSP	
07-067BM-00	2"JIS10K	2"BSP	
07-037J-00	2.5"BS4504	2.5"BSP	756070
07-037M-00	2.5"JIS10K	2.5"BSP	
07-037S-00	2.5"DIN	2.5"BSP	
07-037A-00	2.5"ANSI	2.5"BSP	



07-007AL-00

07-070AL-00

Product Number	Inlet	Outlet
07-007AL-00	2.5"DIN	2.5"BSP
07-070AL-00	2"DIN	2"BSP



07-080-00

07-080A-00

Product Number	Inlet	Outlet
07-080-00	F2"NPT	1.5"NH
07-080A-00	F2"NPT	F1.5"NH
07-080B-00	F2"NPT	1.5"NPT



07-085-00

07-044-00

Product Number	Inlet	Outlet
07-085-00	F2.5"BSP	Φ81.5x5TPI
07-044-00	1.5"BSP	DN45
07-044A-00	2.5"BSP	DN70



07-047-00

07-081-00

Product Number	Inlet	Outlet
07-047-00	1.5 "BSP	F1.5 "BSP

Product Number	Inlet	Outlet
07-081-00	1.5"BSPT	F 1.25"BSP



07-130-00

07-131-00

Product Number	Inlet	Outlet
07-130A-00	2.5"BSP	2.5"BSP
07-130B-00	2 "BSP	2 "BSP
07-130C-00	1.5"BSP	1.5"BSP
07-131-00	2.5"BS336	2.5"BS336



07-041-00

07-042A-00

07-042-00

Product Number	Inlet	Outlet
07-041A-00	1.5 "NPT	€ 38
07-041B-00	2.5 "NPT	€ 65
07-042-00	2.5"BSPT	€ 65
07-042A-00	2 "BSPT	€ 38



07-030-00

07-030D-00

07-030E-00

Product Number	Inlet	Outlet
07-030-00	F4 "BSP	2XF2.5 "NH
07-030A-00	F4 "NPT	2XF2.5 "NH
07-030D-00	F4 "NPT	2XF2.5 "NH
07-030E-00	F4 "NPT	2XF2.5 "BS336



07-052-00



07-052C-00

Product Number	Inlet	Outlet
G07-052-00	F2.5 "BSP	2XF1.5 "BSP
G07-052B-00	F1.5"BSP	2XF1.5 "BSP
G07-052C-00	F1.5"BSP	2XF1 "BSP



07-052B-00

Product Number	Inlet	Outlet
07-054A-00	2.5"BSP	2x2"BSP+2.5"BSP
07-054-00	2.5"BSP	2x2"BSP
07-054B-00	2.5"BSP	2x1.5"BSP
07-054C-00	2"BSP	2x1.5"BSP



07-054A-00



07-054-00



07-056-00

Product Number	Inlet	Outlet
07-056-00	F 2.5"NH	2x1.5"NH
07-056HK-00	2.5"BSP	2x1.5"BSP



07-189C-00



07-190C-00

Product Number	Inlet	Outlet
07-189A-00	DN40	1.5"BSP
07-189B-00	DN50	2"BSP
07-189C-00	DN65	2.5"BSP
07-190A-00	DN40	1.5"BSP
07-190B-00	DN50	2"BSP
07-190C-00	DN65	2.5"BSP



07-166-00



07-166B-00

Product Number	Model	Size	Flange DN	Outlet	DNK
07-166-00	(7334)5K ANGLE HOSE VALVE	DN15	80	M42x2	751706
07-166B-00		DN25	95	M42x2	751708



07-167-00



07-167B-00

Product Number	Model	Size	Flange DN	Outlet	DNK
07-167-00	(7334)5K GLOBE HOSE VALVE	DN15	80	M42x2	751701
07-167B-00		DN25	95	M42x2	751703



07-166A-00



07-166C-00

Product Number	Model	Size	Flange DN	Outlet	DNK
07-166A-00	(7334)10K ANGLE HOSE VALVE	DN15	95	M42x2	751707
07-166C-00		DN25	125	M42x2	751709



07-167A-00



07-167C-00

Product Number	Model	Size	Flange DN	Outlet	DNK
07-167A-00	(7334)10K GLOBE HOSE VALVE	DN15	95	M42x2	751702
07-167C-00		DN25	125	M42x2	751704



Product Number	Model	Size	Length	Flange (mm)	DNPS
07-181A-00	(7303)16K Marine Straight Global Valve	DN15	110	95	750141
07-181B-00		DN20	120	100	750142
07-181C-00		DN25	130	125	750143
07-181D-00		DN32	160	135	750144
07-181E-00		DN40	180	140	750145

Product Number	Model	Size	Length	Flange (mm)	DNPS
07-182A-00	(7409)16K Marine Straight Check Valve	DN15	110	95	751071
07-182B-00		DN20	120	100	751072
07-182C-00		DN25	130	125	751073
07-182D-00		DN32	160	135	751074
07-182E-00		DN40	180	140	751075

Product Number	Model	Size	Length	Flange (mm)	DNPS
07-183A-00	(7301)5K Marine Straight Global Valve	DN15	100	80	750121
07-183B-00		DN20	110	85	750122
07-183C-00		DN25	120	95	750123
07-183D-00		DN32	140	115	750124
07-183E-00		DN40	160	120	750125
07-183F-00		DN50	210	130	750126
07-183G-00		DN65	250	155	750127



Product Number	Model	Size	Length	Flange (mm)	DNPS
07-184A-00	(7351)5K Marine Straight Check Valve	DN15	100	80	751051
07-184B-00		DN20	110	85	751052
07-184C-00		DN25	120	95	751053
07-184D-00		DN32	140	115	751054
07-184E-00		DN40	160	120	751055
07-184F-00		DN50	210	130	
07-184G-00		DN65	250	155	



Product Number	Model	Size	Length	Flange (mm)	DNPS
07-185A-00	(7302)5K Marine Right Angle Global Valve	DN15	80		750131
07-185B-00		DN20	85		750132
07-185C-00		DN25	95		750133
07-185D-00		DN32	115		750134
07-185E-00		DN40	120		750135
07-185F-00		DN50	130		750136
07-185G-00		DN65	155		750137





Product Number	Model	Size	Flange DN	PNPN
07-186A-00	(7352)5K Marine Right Angle Check Valve	DN15	80	751061
07-186B-00		DN20	85	751062
07-186C-00		DN25	95	751063
07-186D-00		DN32	115	751064
07-186E-00		DN40	120	751065
07-186F-00		DN50	130	
07-186G-00		DN65	155	

Product Number	Model	Size	Flange DN	PNPN
07-187A-00	(7304)16K Marine Right Angle Global Valve	DN15	95	750151
07-187B-00		DN20	100	750152
07-187C-00		DN25	125	750153
07-187D-00		DN32	135	750154
07-187E-00		DN40	140	750155

Product Number	Model	Size	Flange DN	PNPN
07-188A-00	(7410)16K Marine Right Angle Check Valve	DN15	95	751081
07-188B-00		DN20	100	751082
07-188C-00		DN25	125	751083
07-188D-00		DN32	135	751084
07-188E-00		DN40	140	751085



08-200D-00



08-200B-00



08-200I-00



08-200C-00



08-200H-00



08-200BQ-00 LIGHT TYPE



08-200A-00 LIGHT TYPE

Main Features :

1. Strong light weight anodized aluminum Construction.
2. DuPont Nylon handle and pistol grip.
3. Stainless steel spinning teeth offers high quality fog performance.
4. Rubber bumper provides maximum durability in harsh condition.
5. Excellent for use with foam tube.

Accessories:

1. Colorful Handle and Pistol Grip.
2. Connection Type: NH, BSP, Storz, BS336, Forestry and Machino Coupling.

Product Number	Pressure	Flow Rate (L/min)	Extending	Weight	Coupling
08-200D-00	7 Bar(100PSI)	50-100-150-230	26M	1Kg	1"/1.5"
08-200B-00	7 Bar(100PSI)	115-230-360-475	32M	1.8Kg	1.5"/2.5"
08-200I-00	7 Bar(100PSI)	115-230-360-475-600	34M	1.8Kg	1.5"/2.5"
08-200C-00	7 Bar(100PSI)	350-450-580-780-950	37M	2.8Kg	1.5"/2.5"
08-200H-00	7 Bar(100PSI)	115-230-360-475	32M	3.9Kg	1.5"/2.5"
08-200H1-00	7 Bar(100PSI)	360	32M	3.4Kg	1.5"/2.5"
08-200BQ-00	7 Bar(100PSI)	115-230-360-475	32M	1.6Kg	1.5"/2.5"
08-200A-00	7 Bar(100PSI)	150-200-230-350	28M	1.4Kg	1"/1.5"



Main Features :

The Foam-water integrated fire nozzle is an extended product based on the Adjustable Flow Rate Nozzle. Pull out the foam tube to directly spray foam, then retract the foam tube.

Accessories:

1. Colorful Handle and Pistol Grip.
2. Connection Type: NH, BSP, Storz, BS336, Forestry and Machino Coupling.



08-230D-00



08-230B-00



08-230C-00

Product Number	Pressure	Flow Rate (LPM)	F Distance	Weight	Coupling
08-230D-00	7 Bar(100PSI)	50-100-150-230	26M	1.3Kg	1.5"/2.5"
08-230B-00	7 Bar(100PSI)	115-230-360-475-600	32M	2.2Kg	1.5"/2.5"
08-230C-00	7 Bar(100PSI)	350-450-580-780-950	37M	3.2Kg	1.5"/2.5"



Main application scenarios :

It can deliver Dual Curtain Stream at the same time. Water curtain is used to protect the safety of people and property, so that fire fighters can step close to heat radiation to improve fire extinguishing effect.



Accessories:

1. Colorful Handle and Pistol Grip.
2. Connection Type: NH, BSP, Storz, BS336, Forestry and Machino Coupling.



08-220B-00



08-200B-87A-00



08-220B-87B-00

Product Number	Pressure	Flow Rate (LPM)	F Distance	Weight	Coupling
08-200B-00	7 Bar(100PSI)	115-230-360-475	32M	2.2Kg	1.5"/2.5"
08-200C-00	7 Bar(100PSI)	350-450-580-780-950	37M	3.1Kg	1.5"/2.5"
Product Number	Pressure	Flow Rate (LPM)	F Distance	Weight	Coupling
08-200B-87A-00	Nylon	475	285*100	0.5Kg	75/50
08-200B-87A1-00	Nylon	475	375*110	0.6Kg	75/50
08-200B-87B-00	Alloy	475	285*100	0.9Kg	75/50
08-200B-87B1-00	Alloy	475	375*110	1Kg	90/50



08-221B-00

08-221C-00

Main Features :

While spraying straight water flow, rotating the nozzle outward allows independent spraying of flower-shaped or umbrella-shaped water streams.

Accessories:

1. Colorful Handle and Pistol Grip.
2. Connection Type: NH, BSP, Storz, BS336, Forestry and Machino Coupling.



Product Number	Pressure	Flow Rate (LPM)	Water Flow (LPM)	Integrated Flow (LPM)	Flow Rate	Weight	Coupling
08-221B-00	7 Bar(100PSI)	500	250	750	36M	1.8Kg	1.5"/2.5"
08-221C-00	7 Bar(100PSI)	950	450	1400	38M	2.65Kg	1.5"/2.5"



Accessories:

1. Colorful Handle and Pistol Grip.
2. Connection Type: NH, BSP, Storz, BS336, Forestry and Machino Coupling.

Main Features :

The medium-expansion foam generator is widely used in oil depots, especially in large, medium, and small oil depots or gas stations, where it can effectively extinguish oil fires. It produces 21 to 200 times expanded foam through physical foaming, which has high coverage capability and excellent fire suppression effects.

Product Number	PSI/MPa Pressure	Flow Rate	F. Distance	Foam Expansion Ratio	Weight	20% Foam Reproduction Time
08-231B-00	0.8Mpa	475LPM	5.5M	20	4Kg	5Min



WOG08-200A2-00
08-200A2-00

WOG08-232B-00
08-232B-00

WOG08-233C-00
08-233C-00

WOG08-234B-00
08-234B-00

Product Number	Pressure	Flow Rate (LPM)	F. Distance	Weight	Coupling
08-232B-00	7 Bar(100PSI)	120	10M	1.5Kg	1.5"/2.5"
08-234B-00	7 Bar(100PSI)	600	20M	1.2Kg	1.5"/2.5"
08-200A2-00	7 Bar(100PSI)	240	20M	1.4Kg	1.5"/2.5"


Product Number	Pressure	Flow Rate (LPM)	Water Flow (LPM)	Integrated Flow (LPM)	F. Distance	Weight	Coupling
08-233B-00	8Bar	475	24M	6	3.5Kg	6.1	1.5"/2.5"
08-233C-00	8Bar	950	28M	6	3.5Kg	6.1	1.5"/2.5"



Main Features :

The multifunctional puncture (capping) fire nozzle consists of five components: a three port force connection piece, a water hose interface piece, a puncture gun head piece, and two sections of extended gun barrel pieces. The complete set of puncture fire nozzle is easy to disassemble and assemble, and can be combined in 5 types according To the needs of the fire scene.

Product Number	Pressure	Flow Rate (LPM)	Expansion Ratio	Weight	Coupling
08-240B-00	0-30Mpa	600	5	6.7Kg	1.5"/2.5"

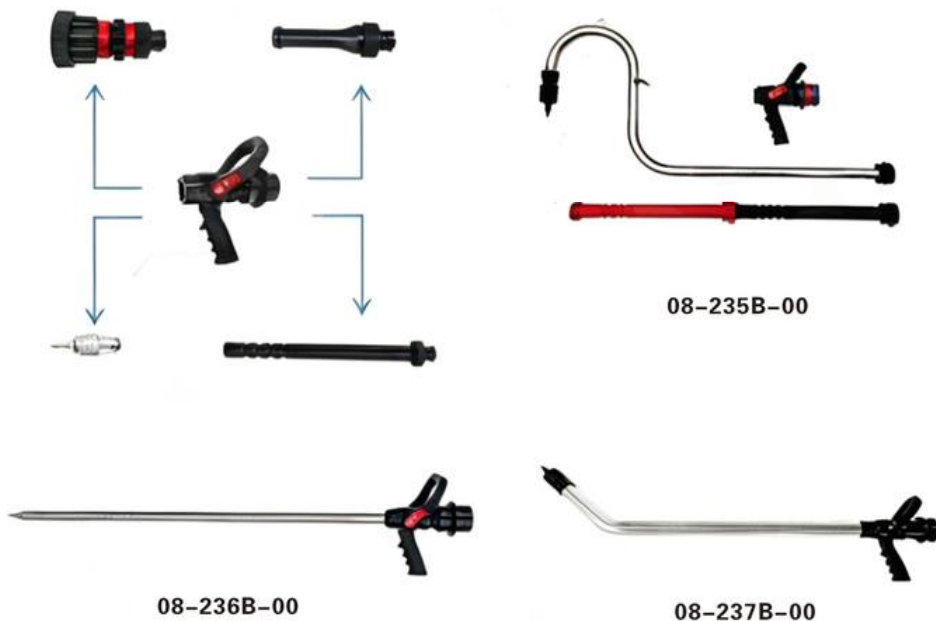

Main Features:
Multi Function Combination Nozzle, which can realize the multi-function combination of body through quick connectors, can realize the fast switching of DC spray/Class A foam/puncture/corner and other functions, and firefighters can choose to install it quickly on site according to the actual fire fighting needs. Suitable for various complex fire environments, it can accurately adjust water flow according to the actual situation of the fire, and improve fire extinguishing efficiency


Accessories:
1. Colorful Handle and Pistol Grip.
2. Connection Type: NH, BSP, Storz, BS336, Forestry and Machino Coupling.

Product Number	Pressure	Flow Rate (L/min)	Extending Rate	Weight	Coupling
08-235B-00	0.7Mpa	475	34000m ³ /h	5.8Kg	1.5"/2.5"
Product Number	Pressure	Flow Rate (L/min)	Length	Weight	Coupling
08-236B-00	0.7Mpa	600	1M	2.4Kg	1.5"/2.5"
08-237B-00	0.7Mpa	135	1.3M	4Kg	1.5"/2.5"



08-205B-00

Main Features:
It can deliver Dual Curtain Stream at the same time. Water curtain is used to protect the safety of people and property, so that fire fighters can step close to heat radiation to improve fire Extinguishing effect.

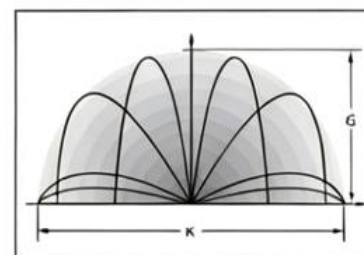

Accessories:
1. Colorful Handle and Pistol Grip.
2. Connection Type: NH, BSP, Storz, BS336, Forestry and Machino Coupling.



08-238B-00



08-239B-00

Product Number	Pressure	Flow Rate (L/min)	Width	Weight	Height
08-205B-00	8Bar(116PSI)	1400	32M	7M	1.5KG

Product Number	Pressure	Flow Rate (L/min)	Extending Rate	Weight	Coupling
08-238B-00	7Bar(100PSI)	475	29M	1.2Kg	1.5"/2.5"
Product Number	Pressure	Flow Rate (L/min)	Flow Rate (L/min)	Weight	Coupling
08-239D-00	8Bar-14Bar	230	7	0.1%-0.5%-1%-3%-5%	1.5"/2.5"
08-239J-00	8Bar-14Bar	360	7	0.1%-0.5%-1%-3%-5%	1.5"/2.5"
08-239B-00	8Bar-14Bar	475	7	0.1%-0.5%-1%-3%-5%	1.5"/2.5"
08-239C-00	8Bar-14Bar	950	7	0.1%-0.5%-1%-3%-5%	1.5"/2.5"



Product Number	Inlet	Outlet
08-003D-00	2.5 "BS336	¢ 16
08-003C-00	2.5 "QLD	¢ 16
08-095-00	2 "GOST	¢ 13
08-096-00	2 "GOST	¢ 13



Product Number	Inlet	Outlet
08-005-00	F1.5 "NH	¢ 22
08-005A-00	F2.5 "NH	¢ 29
08-005B-00	F1.5 "NH	¢ 21.5
08-005B1-00	F1.5 "BSP	¢ 21.5



Product Number	Inlet	Outlet
08-005C-00	F1 "BSP	¢ 16
08-005E-00	F1.5 "BSP	¢ 33
08-005F-00	F1.5 "NH	¢ 28.5
08-005F1-00	F1.5 "BSP	¢ 28.5
08-005Q-00	F1.5 "BSP	¢ 33



Product Number	Inlet	Outlet
08-006-00	1/2 "	¢ 11
08-006A-00	3/4 "	¢ 11
08-006B-00	1 "	¢ 11
08-006C-00	1 1/4 "	¢ 11
08-010-00	1/2 "	¢ 15.6
08-010A-00	3/4 "	¢ 15.6
08-010B-00	1 "	¢ 15.6
08-013-00	1/2 "	¢ 15.6
08-013A-00	3/4 "	¢ 15.6
08-013B-00	1 "	¢ 15.6



08-012-00



08-011-00

08-007C-00



08-019-00



08-008-00

Product Number	Inlet	Outlet
08-012-00	3/4 "	¢ 16
08-012A-00	1 "	¢ 16
08-012B-00	3/4 "	¢ 16 (PLATED)
08-012C-00	1 "	¢ 16 (PLATED)

Product Number	Inlet	Outlet
08-011-00	1/2 "	¢ 11
08-011A-00	3/4 "	¢ 11
08-011B-00	1 "	¢ 11

Product Number	Inlet	Outlet
08-007C-00	1/2 "	¢ 5.4
08-007D-00	3/4 "	¢ 6.35

Product Number	Inlet	Outlet	MPA
08-019-00	1/2 "	¢ 4	333610
08-019A-00	3/4 "	¢ 6	333611
08-019B-00	1 "	¢ 8	333612

Product Number	Inlet	Outlet
08-008-00	1/2 "	¢ 5.4
08-008A-00	3/4 "	¢ 6.4
08-008B-00	1 "	¢ 6.4



Product Number	Inlet	Outlet
08-009-00	1/2 "	¢ 5.4
08-009A-00	3/4 "	¢ 6.4
08-009B-00	1 "	¢ 6.4

Product Number	Inlet	Outlet
08-007-00	1/2 "	¢ 5.4
08-007A-00	3/4 "	¢ 6.4
08-007B-00	1 "	¢ 7



Product Number	Inlet	Outlet
08-018-00	2.5 "NH	¢ 16
08-151-00	2.5 "	¢ 16
08-151A-00	1.5 "	¢ 9



Product Number	Inlet	Outlet
08-205-00	2.5"BSP	¢ 55
08-205A-00	2"BSP	¢ 55
08-205B-00	1.5"BSP	¢ 55

Product Number	Inlet	Outlet
08-014-00	2.5 "BS336	¢ 35
08-014B-00	2 "BS336	¢ 25
08-014D-00	1.5 "BS336	¢ 17.5



Product Number	Inlet	Outlet
08-014F-00	2.5 "	¢ 35
08-014G-00	1.5 "	¢ 25
08-014W-00	1.5 "	¢ 17.5



Product Number	Inlet	Outlet	MPA
08-002C-00	2.5 "BS336	¢ 16	
08-002C1-00	2 "BS336	¢ 13	
08-002C2-00	1.5 "BS336	¢ 9	
08-002D-00	F2.5 "NH	¢ 16	330808
08-002D1-00	F2 "NH	¢ 13	
08-002D2-00	F1.5 "NH	¢ 9	330806
08-002E-00	2.5" Machino	¢ 16	330811
08-002E1-00	2" Machino	¢ 13	330810
08-002E2-00	1.5" Machino	¢ 9	330809



Product Number	Inlet	Outlet	MPA
08-002F-00	2.5 "Nakajima	¢ 16	330804
08-002F1-00	2 "Nakajima	¢ 13	330803
08-002F2-00	1.5 "Nakajima	¢ 9	330801
08-002G-00	2.5 "STORZ	¢ 16	
08-002G1-00	2 "STORZ	¢ 13	
08-002G2-00	1.5 "STORZ	¢ 9	



Product Number	Inlet	Outlet
08-025-00	2.5 "BS336	¢ 13

Product Number	Inlet	Outlet
08-034A-00	3.4 "	¢ 14.6
08-034B-00	1 "	¢ 14.6



Product Number	Inlet	Outlet
08-026-00	UNI70	¢ 12
08-026A-00	UNI70	¢ 16



Product Number	Inlet	Outlet
08-028-00	2 "STORZ	¢ 12
08-028E-00	2 "GOST	¢ 12
08-031-00	1.5 "BS336	¢ 9
08-031A-00	2 "BS336	¢ 10
08-031B-00	2.5 "BS336	¢ 12
08-031C-00	1 "	¢ 5
08-031D-00	3/4 "	¢ 4



Product Number	Inlet	Outlet
08-033-00	F2.5 "BSP	¢ 12
08-033B-00	2.5 "BSP	¢ 12



Product Number	Inlet	Outlet	MPa
08-045-00	2 "STORZ	¢ 30	333606

Product Number	Inlet	Outlet	MPa
08-033A-00	UNI70	¢ 16	333570

Product Number	Inlet	Outlet
08-030-00	2.5 "BS336	¢ 12



Product Number	Inlet	Outlet	MPa
08-029-00	1.5 "STORZ	¢ 9	
08-029A-00	2 "STORZ	¢ 12	333591
08-029B-00	2.5 "STORZ	¢ 12	333592
08-032-00	2 "BS336	¢ 12	
08-032A-00	2.5 "BS336	¢ 12	
08-032B-00	1.5 "BS336	¢ 12	
08-032C-00	2.5 "Nakajima	¢ 12	333571
08-032C1-00	2 "Nakajima	¢ 12	333572
08-032C2-00	1.5 "Nakajima	¢ 12	333573



Product Number	Inlet	Outlet
08-090-00	2.5 "Machino	Φ 20
08-090A-00	1.5 "Machino	Φ 13

Product Number	Inlet	Outlet
08-120A-00	DN33	Φ 11
08-120B-00	DN45	Φ 19.5
08-120C-00	DN70	Φ 15.5

Product Number	Inlet	Outlet
08-059-00	2.5 "BS336	¢ 30.5
08-059B-00	2.5 "BS336	¢ 30.5
08-153-00	2 "BSP	¢ 33
08-154-00	2.5 "BSP	¢ 33



Product Number	Inlet	Outlet
08-037-00	1.5 "STORZ	¢ 18.5
08-037A-00	1 "STORZ	¢ 18.5
08-039-92A	1 1/4 "	¢ 18.5
08-039-92B	1 "	¢ 18.5
07-039-92C	3/4 "	¢ 18.5
07-039-92D	1 "	¢ 18.5
07-039-92E	1 "	¢ 18.5



Product Number	Inlet	Outlet
08-039-92F	3/4 "	€ 18.5
08-039-92G	1/2 "	€ 18.5



Product Number	Inlet	Outlet
08-039B-92	1 "	€ 18.5
08-039B-92A	1 "STORZ	€ 18.5
08-039B-92B	1 "	€ 18.5
08-039B-92C	3/4 "	€ 18.5



Product Number	Inlet	Outlet
08-088-00J	2.5"BS336	Φ20
08-088B-00J	2.5"BS336	Φ20
08-088A-00J	2.5"BS336	Φ20

Product Number	Inlet	Outlet
08-251-00S	2"STORZ	Φ12



Product Number	Inlet	Outlet	It's PA
08-049A-00	2 "STORZ	€ 29	333602
08-049B-00	2.5 "BS336	€ 29	
08-049F-00	2"BSP	€ 29	333605
08-049G-00	2.5"BSP	€ 29	



Product Number	Inlet	Outlet
04-024-00	2 "	
04-025-00	1.5 "	
08-150-00	1.5 "	€ 10或 € 6



Product Number	Inlet	Outlet
08-036-00	F1.5 "NH	€ 20
08-036A-00	F2.5 "NH	€ 20
08-036B-00	F1.5 "BSP	€ 20
08-036C-00	2 "BSP	€ 20
08-036D-00	F1.5 "NPT	€ 20
08-036E-00	F2 "BSP	€ 20
08-042-00	3/4 "	€ 13
08-042A-00	1 "	€ 13
08-044-00	3/4 "	€ 13
08-044A-00	1 "	€ 13
08-046-00	2 "STORZ	€ 25



Product Number	Inlet	Outlet
08-052-00	€ 6.5+€ 3(1 "BSPT)	€ 6.5
08-052A-00	€ 6.6(1 "BSPT)	€ 6.6
08-052B-00	€ 6.5+€ 3(1 "BSPT)	€ 6.5
08-052C-00	€ 5+€ 2(3/4 "BSPT)	€ 5
08-052D-00	€ 4+€ 2(1/2 "BSPT)	€ 4



Product Number	Inlet	It's PA
08-152A-00	2"BSP	330609
08-152B-00	2.5"BS336	
08-152C-00	2"STORZ	
08-152F-00	2.5"BS336	
08-152A-00A	F1.5"NH	





08-057-00



08-101-00



08-60-00



08-201-00



Product Number	Flow Rate (LPM)	Inlet	Outlet
08-057-00	225	2.5"BS336	2.5"BS336
08-057W-00	450	2.5"BS336	2.5"BS336

Product Number	Inlet	Outlet
08-101-00	2"BSP	2"BSP

Product Number	Inlet	Outlet
08-060-00	1.5"NH	1.5"NH

Product Number	TYPE	Flow Rate
08-201-00	QP4/0.7Z	240L/M
08-201A-00	QP8/0.7Z	480L/M
08-201B-00	QP16/0.7Z	960L/M

Product Number	Inlet	Outlet
08-005E7-00	2.5"BS336	Φ30
08-005E8-00	2"BS336	Φ30
08-014E-00	1.5"BS336	Φ20
08-005E1-00	2.5"Nakajima	Φ30
08-005E2-00	2"Nakajima	Φ30
08-005G1-00	1.5"Nakajima	Φ20
08-005E10-00	2.5"NH	Φ30
08-005E11-00	2"NH	Φ30
08-005G7-00	1.5"NH	Φ20
08-005E5-00	2.5"STORZ	Φ30
08-005E6-00	2"STORZ	Φ30
08-005G3-00	1.5"STORZ	Φ20
08-005E3-00	2.5"Machino	Φ30
08-005E4-00	2"Machino	Φ30
08-005G2-00	1.5"Machino	Φ20



08-065-00 08-065A-00 08-065B-00



08-066-00 08-066A-00 08-066B-00



08-067-00 08-067A-00 08-067B-00



08-068-00 08-068A-00 08-068B-00

Product Number	Inlet	Outlet	INPA
08-065-00	2.5"BS336	Φ30	333579
08-065A-00	2"BS336	Φ30	
08-065B-00	1.5"BS336	Φ20	

Product Number	Inlet	Outlet	INPA
08-066-00	2.5"Nakajima	Φ30	330804 330804
08-066A-00	2"Nakajima	Φ30	330803 330803
08-066B-00	1.5"Nakajima	Φ20	330801 330801

Product Number	Inlet	Outlet	INPA
08-067-00	F 2.5"NH	Φ30	330808
08-067A-00	F2"NH	Φ30	
08-067B-00	F1.5"NH	Φ20	333576

Product Number	Inlet	Outlet	INPA
08-068-00	2.5"STORZ	Φ30	333603
08-068A-00	2"STORZ	Φ30	333602
08-068B-00	1.5"STORZ	Φ20	



Product Number	Inlet	Outlet
08-066D-00	2.5 "Nakajima	16
08-066E-00	2 "Nakajima	13
08-066F-00	1.5 "Nakajima	9
08-068D-00	2.5 "STORZ	16
08-068E-00	2 "STORZ	13
08-068F-00	1.5 "STORZ	9
08-070D-00	2.5 "Machino	16
08-070E-00	2 "Machino	13
08-070F-00	1.5 "Machino	9



Product Number	Inlet	Outlet
08-070-00	2.5 "Machino	30
08-070A-00	2 "Machino	30
08-070B-00	1.5 "Machino	20



Product Number	Inlet	Outlet	DATA
08-079-00	Nakajima	E	
08-081-00	Machino	B	
08-082-00	STORZ	A	
08-083-00	John Morris	D	
08-084-00	ANSI Pin	C	
08-086-00	2"BSP	330830	Brass
08-087-00	2"BSP	333550	Aluminum



Product Number	Inlet	Outlet
08-064-00	1 "	22

Product Number	Inlet	Outlet
08-085-00	1 "	9

澳式接口 Australian Pin Fire Hose Coupling



Product Number	Inlet	Outlet
09-001-00	1.5 "BSP	38
09-002-00	2.5 "QLD	64
09-002A-00	2.5 "FBT	64
09-002B-00	2.5 "NH	64
09-003-00	2.5 "FBT	38
09-003A-00	2.5 "NH	38

德式接口 STORZ Fire Hose Coupling



Product Number	Inlet	Outlet	DATA
09-009A-00	4 "STORZ	100	
09-009B-00	3 "STORZ	75.5	330876
09-009C-00	2.5 "STORZ	63.5	330875
09-009D-00	2 "STORZ	51	
09-009E-00	1 3/4 "STORZ	44.5	
09-009F-00	1.5 "STORZ	38	
09-010B-00	3 "STORZ		333425
09-010C-00	2.5 "STORZ		333424
09-010D-00	2 "STORZ		333423
09-010E-00	1 3/4 "STORZ		
09-010F-00	1.5 "STORZ		333422

Product Number	Inlet	Outlet	DATA
09-011-35A	2 "STORZ	F1.5BSP	333401
09-011-35B	3 "STORZ	F3 "BSP	
09-011-35C	2.5 "STORZ	F2.5 "BSP	333404
09-011-35D	2 "STORZ	F2 "BSP	333402
09-011-35E	1 3/4 "STORZ	F2 "BSP	
09-011-35F	1.5 "STORZ	F1.5 "BSP	
09-011-35G	2.5 "STORZ	F2 "BSP	333403
09-011A-35B	3 "STORZ	3 "BSP	333415
09-011A-35C	2.5 "STORZ	2.5 "BSP	333414
09-011A-35D	2 "STORZ	2 "BSP	333412
09-011A-35E	2 "STORZ	1.5 "BSP	333411
09-011A-35F	1.5 "STORZ	1.5 "BSP	
09-009G-00	2 "STORZ	25	
09-011A-35G	2.5 "STORZ	2 "BSP	333413



09-012-00



09-013-00



09-014-00



09-015-35A



09-015-35 09-045-00

Product Number	Inlet	Outlet	INPA
09-012A-00	4 "STORZ	¢ 100	
09-012B-00	3 "STORZ	¢ 75.5	
09-012C-00	2.5 "STORZ	¢ 63.5	
09-012D-00	2 "STORZ	¢ 51	
09-012E-00	1.5 "STORZ	¢ 38	
09-012F-00	1 "STORZ	¢ 25.4	
09-012G-00	3/4 "STORZ	¢ 19	
09-013A-00	4 "STORZ	¢ 100	
09-013B-00	3 "STORZ	¢ 75.5	
09-013C-00	2.5 "STORZ	¢ 63.5	
09-013D-00	2 "STORZ	¢ 51	
09-013E-00	1.5 "STORZ	¢ 38	
09-013F-00	1 "STORZ	¢ 25.4	
09-013G-00	3/4 "STORZ	¢ 19	
09-014A-00	4 "STORZ		333375
09-014B-00	3 "STORZ		333374
09-014C-00	2.5 "STORZ		333373
09-014D-00	2 "STORZ		333372
09-014E-00	1.5 "STORZ		333371
09-014F-00	1 "STORZ		
09-015-35A	4 "STORZ	F4 "BSP	
09-015-35B	3 "STORZ	F3 "BSP	333348
09-015-35C	2.5 "STORZ	F2.5 "BSP	333345
09-015-35D	2 "STORZ	F2 "BSP	333342
09-015-35E	1.5 "STORZ	F1.5 "BSP	
09-015-35F	1 "STORZ	1 "BSP	
09-015-35W	1.75 "STORZ	2 "BSP	
09-015-35J	2.5 "STORZ	2.5 "BSP	
09-015A-35A	4 "STORZ	4 "BSP	
09-015A-35B	3 "STORZ	3 "BSP	333355
09-015A-35C	2.5 "STORZ	2.5 "BSP	333354
09-015A-35D	2 "STORZ	2 "BSP	333352
09-015A-35E	1.5 "STORZ	1.5 "BSP	
09-015A-35F	1 "STORZ	1 "BSP	
09-015-35G	3 "STORZ	2.5 "NH	
09-015-35H	2.5 "STORZ	2.5 "ORT	
09-015-35I	2.5 "STORZ	2.5 "FBT	

加拿大式接口 Forestry Fire Hose Coupling



08-023H-00 09-023B-00 09-023D-00

Product Number	Inlet	Outlet
09-023A-00	1.5"	1.5 "¢ 38
09-023B-00	1.5"	1.5 "BSP
09-023C-00	1.5"	1.5 "NPSH
09-023D-00	1.5"	F1.5 "BSP

美式接口 American (ANSI Pin) Fire Hose Coupling



09-002D-00 09-003B-00 09-002G-00



09-002D-00 09-002F-00 09-002H-00



09-007AW-00(NH) 09-007CW-00(NH) 09-007BW-00(NH)

Product Number	Inlet	Outlet	INPA
09-002D-00	2.5 "NH	¢ 63.5	330866
09-002E-00	2.5 "NH	¢ 51	
09-002F-00	2 "NH	¢ 51	
09-002H-00	1.5 "NH	¢ 38	330865
09-003B-00	2 "BSP	¢ 51	
09-003C-00	1.5 "BSP	¢ 38	
09-007A1-00	2.5 "NH	¢ 63.5 (DOUBLE LAYER)	
09-007A2-00	2.5 "NH	¢ 63.5	
09-007A3-00	2.5 "NH	¢ 44.5	
09-007A8-00	2.5 "NH	¢ 63.5	

Product Number	Inlet	Outlet
09-007AW-00(IPT)	2.5 IPT	2 1/2"-2 3/4"
09-007AW1-00(IPT)	2.5 IPT	2 1/2"-2 13/16"
09-007AW-00(NH)	2.5 NH	2 1/2"-2 3/4"
09-007AW1-00(NH)	2.5 NH	2 1/2"-2 13/16"
09-007BW-00(IPT)	1.5 IPT	1 1/2"-1 11/16"
09-007BW1-00(IPT)	1.5 IPT	1 1/2"-1 3/4"
09-007BW-00(NH)	1.5 NH	1 1/2"-1 11/16"
09-007BW1-00(NH)	1.5 NH	1 1/2"-1 3/4"
09-007CW-00(IPT)	2 IPT	2"-2 3/16"
09-007CW1-00(IPT)	2 IPT	2"-2 1/4"
09-007CW-00(NH)	2 NH	2"-2 3/16"
09-007CW1-00(NH)	2 NH	2"-2 1/4"



09-008AW-00(NH) 09-008BW-00(NH) 09-008CW-00(NH) 09-008DW-00(NH)

Product Number	Inlet	Outlet
09-008AW-00(IPT)	2.5 IPT	2 1/2"-2 3/4"
09-008AW1-00(IPT)	2.5 IPT	2 1/2"-2 13/16"
09-008AW-00(NH)	2.5 NH	2 1/2"-2 3/4"
09-008AW1-00(NH)	2.5 NH	2 1/2"-2 13/16"
09-008BW-00(IPT)	1.5 IPT	1 1/2"-1 11/16"
09-008BW1-00(IPT)	1.5 IPT	1 1/2"-1 3/4"
09-008BW-00(NH)	1.5 NH	1 1/2"-1 11/16"
09-008BW1-00(NH)	1.5 NH	1 1/2"-1 3/4"
09-008CW-00(IPT)	2 IPT	2"-2 3/16"
09-008CW1-00(IPT)	2 IPT	2"-2 1/4"
09-008CW-00(NH)	2 NH	2"-2 3/16"
09-008CW1-00(NH)	2 NH	2"-2 1/4"
09-008DW-00(IPT)	1 IPT	1"-1 3/16"
09-008DW1-00(IPT)	1 IPT	1"-1 1/4"
09-008DW-00(NH)	1 NH	1"-1 3/16"
09-008DW1-00(NH)	1 NH	1"-1 1/4"

日式接口 Machino Fire Hose Coupling



Product Number	Inlet	Outlet	INPA
09-024A-00	2.5"	φ63.5	330857
09-024B-00	2"	φ51	330856
09-024C-00	1.5"	φ38	330855
09-024D-00	2.5"	φ51	
09-024E-00	2.5"	φ38	
09-024A1-00	2.5"	F2.5 "BSP	
09-024A2-00	2.5"	2.5 "BSP	
09-024B1-00	2"	F2 "BSP	331874
09-024A-89-00	2.5"		331880
09-024B-89-00	2"		331879
09-024C-89-00	1.5"		331878
09-024C10-00	1.5"	F2"BSP	331871
09-024B6-00	2"	F2"BSP	331873
09-024A6-00	2.5"	F2"BSP	331876
09-024A4-00	2.5"	F2.5"BSP	331877

Product Number	Inlet	Outlet
09-034A-00	2.5" Machino	φ65
09-034B-00	2" Machino	φ50
09-034C-00	1.5" Machino	φ40

俄式接口 GOST Fire Hose Coupling



Product Number	Inlet	Outlet
09-040E-00	φ25 (1")	φ25
09-040D-00	φ50 (2")	φ50
09-040C-00	φ70 (2.5")	φ70
09-040B-00	φ80 (3")	φ80
09-040A-00	φ100 (4")	φ100
09-041E-00	φ25 (1")	F1 "BSP
09-041D-00	φ50 (2")	F2 "BSP
09-041C-00	φ70 (2.5")	F2.5 "BSP
09-041B-00	φ80 (3")	F3 "BSP
09-042E-00	φ25 (1")	1 "BSP
09-042D-00	φ50 (2")	2 "BSP
09-042C-00	φ70 (2.5")	2.5 "BSP
09-042B-00	φ80 (3")	3 "BSP
09-042A-35A-00	φ70 (2.5")	F2.5"BSP
09-042B-35A-00	50(2)	F2"BSP
09-042A-00	φ70(2.5")	φ70 (2.5")
09-042B-00	50(2")	50(2")

挪威式接口 NOR Fire Hose Cupling



Product Number	Inlet	Outlet	INPA
09-050-00	2.5"	φ65	330864
09-050A-00	2"	φ50	330863
09-050B-00	1.5"	φ38	330862

意式接口 UNI Fire Hose Coupling



Product Number	Inlet	Outlet	INPA
09-004-00	UNI70	φ70(LIGHT TYPE)	331842
09-004A-00	UNI70	φ70(HEAVY TYPE)	



Product Number	Inlet	Outlet	INPA
09-005-00	UNI45	φ45(HEAVY TYPE)	
09-005A-00	UNI45	φ45(HEAVY TYPE)	331841
09-006-00	UNI45	φ45(LIGHT TYPE)	



Product Number	Inlet	Outlet	INPA
09-004A1-00	UNI70	2.5 "BSP	331853
09-004A2-00	UNI70	F2.5 "BSP	331857
09-005B1-00	UNI145	1.5 "BSP	
09-005B2-00	UNI145	F2 "BSP	331851



Product Number	Inlet	INPA
09-030-00	M85X6 MALE	
09-031-00	M56X4 MALE	
09-032-00	M85X6 FEMALE	331862
09-033-00	M56X4 FEMALE	331861

英式接口 John Morris Fire Hose Coupling



09-017A-00 09-017B-00 09-017C-00

Product Number	Inlet	Outlet
09-017A-00	2.5 "BS336	€ 63.5
09-017B-00	2 "BS336	€ 51
09-017C-00	1.5 "BS336	€ 38
09-017D-00	2.5 "BS336	€ 51
09-017E-00	2.5 "BS336	€ 38
09-017F-00	2 "BS336	€ 38



09-017D-00 09-017E-00 09-017E1-00

Product Number	Inlet	Outlet	UNPA
09-017A1-00	2.5 "BS336	€ 63.5	330933
09-017B1-00	2 "BS336	€ 51	330932
09-017C1-00	1.5 "BS336	€ 38	330931
09-017D1-00	2.5 "BS336	€ 51	
09-017E1-00	2.5 "BS336	€ 38	
09-017F1-00	2 "BS336	€ 38	



09-018A-00 09-018B-00 09-018C-00

Product Number	Inlet	Outlet
09-018A-00	2.5 "BS336	€ 63.5
09-018B-00	2 "BS336	€ 51
09-018C-00	1.5 "BS336	€ 38
09-018D-00	2.5 "BS336	€ 51
09-018E-00	2.5 "BS336	€ 38
09-018F-00	2 "BS336	€ 38



09-018E-00

Product Number	Inlet	Outlet	UNPA
09-018A1-00	2.5 "BS336	€ 63.5	330861
09-018B1-00	2 "BS336	€ 51	330860
09-018C1-00	1.5 "BS336	€ 38	330859
09-018D1-00	2.5 "BS336	€ 51	
09-018E1-00	2.5 "BS336	€ 38	
09-018F1-00	2 "BS336	€ 38	



09-018A1-00 09-018B1-00 09-018C1-00



09-018K1-00 09-018K2-00
09-018K-00

Product Number	Inlet	Outlet
09-018K-00	2.5 "BS336	F2.5 "BSP
09-018K1-00	2.5 "BS336	2.5 "BSP
09-018K2-00	2.5 "BS336	1.5 "BSP



09-020-89-00 09-020-89A-00

Product Number	Inlet	UNPA
09-020-89-00	F2.5 "BS336	333246
09-020-89A-00	2.5 "BS336	333245



09-019A-00 09-019C-00



09-019B-00 09-019D-00

Product Number	Inlet	Outlet	UNPA
09-019A-00	F2.5 "BSP	2.5 "BS336	
09-019B-00	2.5 "BSP	2.5 "BS336	
09-019C-00	F2 "BSP	2.5 "BS336	333234
09-019D-00	F2.5 "BSP	2.5 "BS336	333235



Product Number	Inlet	Outlet	MPA
09-019E-00	F2.5 "BSP	2.5 "BS336	
09-019F-00	F2.5 "BSP	2.5 "BS336	333237
09-019G-00	2 "BSP	2.5 "BS336	
09-019H-00	2.5 "NPT	2.5 "BS336	
09-019D-00	F2.5 "BSP	2.5 "BS336	333236



Product Number	Inlet	Outlet	MPA
09-020-35A	2.5 "BS336	F1.5 "BSP	
09-020-35B	2.5 "BS336	F2 "BSP	333238
09-020-35C	2.5 "BS336	F2.5 "BSP	333239
09-020-35D	1.5 "BS336	F1.5 "BSP	
09-020-35E	2 "BS336	F2 "BSP	

Product Number	Inlet	Outlet	MPA
09-020A-35A	2.5 "BS336	1.5 "BSP	333472
09-020A-35B	2.5 "BS336	2 "BSP	333473
09-020A-35C	2.5 "BS336	2.5 "BSP	333467
09-020A-35D	1.5 "BS336	1.5 "BSP	
09-020A-35E	2 "BS336	2 "BSP	333468
09-020A-35F	2.5 "BS336	2.5 "NST	
09-020B-35A	2.5 "BS336	F1.5 "BSP	
09-020B-35B	2.5 "BS336	F2 "BSP	333241
09-020B-35C	2.5 "BS336	F2.5 "BSP	333242
09-020B-35D	1.5 "BS336	F1.5 "BSP	
09-020B-35E	2 "BS336	F2 "BSP	
09-020A-35B1	2.5 "BS336	2 "BSP	333243
09-020A-35C1	2.5 "BS336	2.5 "BSP	333244 Aluminum

中岛式接口 Nakajima Fire Hose Coupling



Product Number	Inlet	Outlet	MPA
09-025A-00	2.5 "	ø 63.5	330853
09-025B-00(2)	2 "	ø 51	330852
09-025C-00	1.5 "	ø 38	330851
09-025D-00	2.5 "	ø 51	
09-025E-00	2.5 "	ø 38	
09-025F-00	2 "	ø 38	
08-025A-00AL	2.5 "	ø 63.5	
08-025B-00AL	2 "	ø 51	
08-025C-00AL	1.5 "	ø 38	



Product Number	Inlet	Outlet	MPA
09-026-35A	2.5 "	F2.5 "BSP	331884
09-026-35B	2 "	F2 "BSP	331882
09-026-35C	1.5 "	F1.5 "BSP	
09-026-35D	2.5 "	F2 "BSP	331883
09-026-35E	1.5 "	F2 "BSP	331881
09-026A-35A	2.5 "	2.5 "BSP	
09-026A-35B	2 "	2 "BSP	
09-026A-35C	1.5 "	1.5 "BSP	



Product Number	Inlet	MPA
09-025A-89-00	2.5 "Nakajima	331898
09-025B-89-00	2 "Nakajima	331897
09-025C-89-00	1.5 "Nakajima	331896

法式接口 Guillemin Fire Hose Coupling



09-030

Product Number	Inlet	Outlet	INPA
09-030A	DN65	ø 65/ø 70	331801
09-030B	DN50	ø 50	331802
09-030C	DN40	ø 40/ø 45	331803



09-057C-35F 09-052D1-35C3

09-001A-00



10-053-00

Product Number	Inlet	Outlet
09-001A-00	1 "BSP	ø 25
09-001B-00	1 "BSP	ø 19

Product Number	Inlet	Outlet
10-057C-35F	1.5 "NH	1.5 "NPT
10-052D1-35C3	M56X4	2 "BSP
010-053A-00	M85X6	M85X6
010-053B-00	M85X6	2.5 "BSP
010-053C-00	2.5 "NH	2.5 "BSP

KITCHEN FIRE PROTECTION ACCESSORIES



29-01-1H 29-01-2H 29-01-3H 29-01-4H 29-02-245 29-02-1N 29-02-3N 29-02-2W 29-02-290



29-02-139-00

29-02-245-89



29-03-1H 29-03-1L 29-02-35-00 29-02-132



29-02-139A-00



29-03-123



29-02-136-00



29-03-35A-00



10-046-00

Product Number	Inlet	INPA
10-046A-00	2.5 "NH	756120
10-046B-00	2 "NH	
10-046C-00	1.5 "NH	756119

Product Number	Inlet	INPA
10-046A1-00	2.5 "BSP	
10-046B1-00	2 "BSP	
10-046C1-00	1.5 "BSP	



10-047-00



10-041-35

10-042-35



10-041-35K

10-041-35J



10-057A-35

10-057C-35

10-056-00

Product Number	Inlet	Outlet
10-041-35	F2.5 "NH	1.5 "NH
10-042-35	F2.5 "NH	1.5 "NH
10-041-35J	F2.5 "NH	3/4"GHT
10-041-35K	F2.5 "NH	2"NPT

Product Number	Inlet	Outlet
10-056-00	F2 "BSP	2 "BSP
10-056A-00	F2.5 "BSP	2.5 "BSP

Product Number	Inlet	Outlet
10-057A-35	2.5 "NPT	2.5 "NH
10-057C-35	1.5 "NPT	1.5 "NH

CAMLACK & GROOVE COUPLING



TYPE A

TYPE B

TYPE C

TYPE D



TYPE A

TYPE B

TYPE C

TYPE D



TYPE E

TYPE F

TYPE DC

TYPE DP



TYPE E

TYPE F

TYPE DC

TYPE DP

10-045-00

10-048-00



10-079-00



10-080-00



10-081-00



10-082-00



10-083-00



10-084-00



10-085-00(1.5\"/>



10-086-00



10-087A-78



10-093-78



10-092-78



10-087B-78



10-101-78



10-087C-78



10-097-78



10-098-78



10-099-78



10-0100-78



10-070-00



10-071-00



10-072-00



10-073-00



10-074-00



10-075-00



10-076-00



10-077-00



10-078-00

Product Number	Inlet
10-070-00	1.5 "-2.5 "

Product Number	Inlet
10-060-00	2.5 "

Product Number	Inlet	IMPA
10-072-00	1.5 "X2 "X3"	333427 Brass

Product Number	Inlet	IMPA
10-073-00	1.5 "X2 "X3"	333429 Steel

Product Number	Inlet	IMPA
10-074-00	4 "X5 "	333430 Steel

Product Number	Inlet	IMPA
10-075-00	2 "X3 "	333428 Steel


Product Number	Inlet
10-076-00	1.5 "

Product Number	Inlet
10-077-00	2 "

Product Number	Inlet	IMPA
10-078-00	1.5"	330791
10-078A-00	2"	330792
10-078B-00	2.5"	330793



Product Number	Inlet
13-011-00	1.5 "
13-011A-00	2.5 "

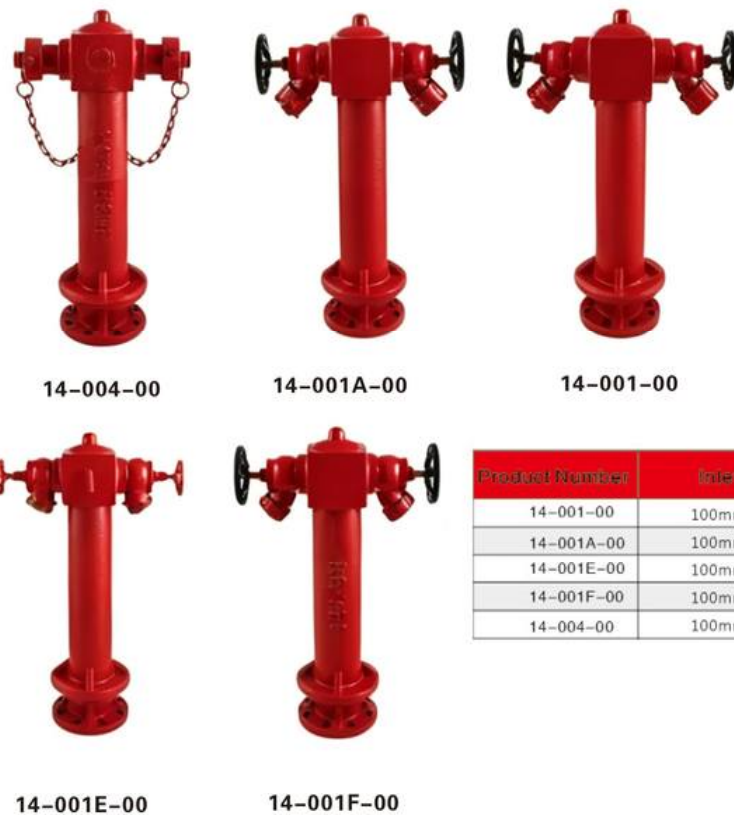

Product Number	Inlet	Outlet
14-001-00	100mm	2X2.5"BS336
14-001A-00	100mm	2X2.5"BS336
14-001E-00	100mm	2X2.5"BSP
14-001F-00	100mm	2XF2.5"BSP
14-004-00	100mm	2XΦ65mm



Product Number	Inlet	Outlet
14-003A-00	150mm	2x2.5 "BS336+4 "BSRT
14-008-00	100mm	2xDN65+DN100
14-008A-00	100mm	2xDN65+DN100



Product Number	Inlet	Outlet
14-006-00	100mm	2x2.5 "BSP+4 "BSP
14-007-00	150mm	2x2.5 "BS336+4 "BSP



Product Number	Inlet	Outlet
14-012-00	2.5 "	2X2.5 "BS336
14-012A-00	2.5 "	2.5 "BS336
14-011-00	2.5 "	2x2"BSP (2"Storz)
14-012D-00	2.5 "	2.5"BS336



08-204-00

Product Number	08-204-00		
Model	PS8/20W	PS8/30W	PS8/40W
Flow Rate(L/S)	20	30	40
Rated W.P. (MPa)	0.8		
W.P. Range(MPa)	0.5~1.6		
Diameter(mm)	55	60	65
Angle Of Horizontal Rotation(°)	360		
Angle Of Vertical Rotation(°)	-60~+70		
Material	Aluminum Alloy/nozzle Stainless Steel		
Installation Mode	Seating Arrangement		
Service Environment	-10℃~+50℃		



08-207-00

Product Number	08-207-00			
Model	PL24	PL32	PL40	PL48
Flow Rate(L/S)	24	32	40	48
Rated W.P. (MPa)	1.2	1.2	1.2	1.6
W.P. Range(MPa)	0.5~1.6			
Diameter(mm)	50	55	60	65
Angle Of Horizontal Rotation(°)	360			
Angle Of Vertical Rotation(°)	-60~+70			
Material	Stainless Steel 304			
Installation Mode	DN100/Or customized			
Service Environment	-10℃~+50℃			



08-205-00

Product Number	08-205-00	
Model	PS8/20W	PS8/30W
Flow Rate(L/S)	20	30
Rated W.P. (MPa)	0.8	
W.P. Range(MPa)	0.5~1.6	
Diameter(mm)	55	60
Angle Of Horizontal Rotation(°)	360	
Angle Of Vertical Rotation(°)	-60~+70	
Material	Aluminum Alloy/nozzle Stainless Steel	
Installation Mode	Seating Arrangement	
Service Environment	-10℃~+50℃	



08-208-00

Product Number	08-208-00			
Model	PS8/20W	PS8/30W	PS8/40W	PS10/50W
Flow Rate(L/S)	20	30	40	50
Rated W.P. (MPa)	0.8	0.8	0.8	1.0
W.P. Range(MPa)	0.5~1.6			
Diameter(mm)	55	60	65	70
Angle Of Horizontal Rotation(°)	360			
Angle Of Vertical Rotation(°)	-60~+70			
Material	Aluminum Alloy			
Installation Mode	Seating Arrangement			
Service Environment	-10℃~+50℃			



08-206-00

Product Number	08-206-00				
Model	PL24	PL32	PL40	PL50	PL64
Flow Rate(L/S)	24	32	40	50	64
Rated W.P. (MPa)	1.2	1.2	1.2	1.6	
W.P. Range(MPa)	0.5~1.6				
Diameter(mm)	55	60	65	70	75
Angle Of Horizontal Rotation(°)	360				
Angle Of Vertical Rotation(°)	-60~+70				
Material	Aluminum Alloy/Stainless Steel 304				
Installation Mode	DN100 /Or customized				
Service Environment	-10℃~+50℃				



01-020-00



14-020A-00

Product Number	Model	Outlet
01-020-00	100mm	100mm
14-020A-00	100mm	2.5"LVT
14-020B-00	100mm	2.5"BSRT



13-002-00



13-004-00

13-001-00

Product Number	Inlet	Outlet
13-001-00	2X2.5 "BS336	100mm
13-002-00	4X2.5 "BS336	150mm
13-004-00	2X2.5 "BS336	100mm



13-010-00

Product Number	Inlet	Outlet
13-010-00	2.5 "	2 "STORZ



13-010C



13-003-00

Product Number	Inlet	Outlet	INPA
13-010C	2"BSP	¢178	330841
13-010D	2.5"BSP	¢178	

Product Number	Inlet	Outlet
13-003-00	2.5 "BS336	3 "BSP



09-022-00



13-010D



17-00



28-120-00J

28-140-00J

Product Number	Inlet	Outlet	INPA
28-120-00J	2.5"BS336	2.5"BS336	120L
28-140-00J	2.5"BS336	2.5"BS336	140L
28-200-00J	2.5"BS336	2.5"BS336	200L

消防水带 Fire Hose



13-017-00



13-018-00



13-019-00



13-015-00



13-016-00



13-020-00



A



B



C



D

1.5" 2" 2.5" 3" 4"

FIRE HOSE REEL



Product Number	Inlet	Outlet
11-001-00	1"	1"
11-001A-00	1"	3/4"
11-001B-00	3/4"	3/4"
11-003-00	1"	1"
11-003A-00	1"	3/4"
11-003B-00	3/4"	3/4"
11-004-00	1"	1"
11-004A-00	1"	3/4"
11-004B-00	3/4"	3/4"

Product Number	Inlet	Outlet
11-007-00	1"	1"
11-007A-00	1"	3/4"
11-007B-00	3/4"	3/4"
11-010-00	1"	1"
11-010A-00	1"	3/4"
11-010B-00	3/4"	3/4"

Model No.	Type	Hose Diameter&length	Height (A in mm)	Width(B in mm)	Depth(C in mm)	Min.Cabinet Size (W*H*D)in mm
12-001	Manual&Swinging	25mm×20m/25m/30m	600	570-580	210	750×750×250
12-011	Manual&Swinging	19×25m/30m	470/480/500	515	240	600×600×250
12-001D	Automatic&Swinging	19/25mm×20m/25m/30m	555	570-580	260	700×700×270
12-002	Manual&Swinging Pipe	19/25mm×20m/25m/30m	580	620	260	700×700×280
	Automatic&Swinging Pipe	19/25mm×20m/25m/30m	600	640	250	750×750×280
12-003	Manual&Swinging Pipe	19×20m/25m/30m/36m	510	550	320	700×700×360
	Manual&Swinging Pipe	25×20m/25m/30m	570	580	300	750×750×250
12-004	Automatic&Swinging	25mm×20m/30m	555	570-580	260	700×700×270

FIRE HOSE REEL



Model No.	Type	Hose Diameter&length	Height (A in mm)	Width(B in mm)	Depth(C in mm)	Min.Cabinet Size (W*H*D)in mm
12-005	Manual&Swinging	19mm×25m/30m	470	515	240	600×600×250
12-006	Manual&Swinging	19/25mm×20m/25m/30m	600	610-620	210	760×760×250
12-006A	Manual&Swinging	19/25mm×20m/25m/30m	555	570-580	260	750×750×250
	Automatic&Swinging	19/25mm×20m/25m/30m	555	570-580	260	750×750×250
12-007	Manual&Fixed	19×25m/30m	725	555	215	760×720×230
12-009	Layflat hose reel	1.5"×25m/30m	435/450/470	535	135	600×600×200
12-008	Manual&Fixed	19/25mm×20m/25m/30m	555	570-580	210	
12-010	Manual&Swinging	33mm×30m	810	650	350	
12-010A	Manual&Swinging	25mm×30m	810	650	350	

FIRE EXTINGUISHER (CABINET)



12-101



12-102

Model No.	W×H×D(mm)	SPECIFICATION
12-101	700×300×253	4-6kg Fire Extinguisher
12-102	830×310×263	9-12kg Fire Extinguisher
OEM AVAILABLE		



12-103



12-103A

Model No.	W×H×D(mm)	SPECIFICATION
12-103	570×270×210	4.5/6kg Fire Extinguisher
12-103A	760/850×280×230	9-12kg Fire Extinguisher
OEM AVAILABLE		



12-104



12-105

Model No.	W×H×D(mm)	SPECIFICATION
12-104	760/850×280×230	9-12kg Fire Extinguisher
12-105	800×300×280	12kg Fire Extinguisher
OEM AVAILABLE		



12-106



12-107

Model No.	W×H×D(mm)	SPECIFICATION
12-106	700×280×250	9kg Fire Extinguisher
12-107	750×300×220	9kg Fire Extinguisher
	650×280×220	6kg Fire Extinguisher
OEM AVAILABLE		

FIRE EXTINGUISHER (CABINET)



12-108



12-109

Model No.	W×H×D(mm)	SPECIFICATION
12-108	440×340×140	Surface or recessed
12-109	850×450×280	2pcs 9kg Fire Extinguisher
OEM AVAILABLE		



12-110



12-111

Model No.	W×H×D(mm)	SPECIFICATION
12-110	600×200×200	4-6kg Fire Extinguisher
	800×300×250	9-12kg Fire Extinguisher
12-111	650×250×220	6kg Fire Extinguisher
OEM AVAILABLE		



12-112

Model No.	W×H×D(mm)	SPECIFICATION
12-112	600×270×210	4-6kg Stainless steel(F.E)
		Stainless Steel
OEM AVAILABLE		



12-113

Model No.	W×H×D(mm)	SPECIFICATION
12-113	760/850×280×230	9-12kg Stainless steel(F.E)
		Stainless Steel
OEM AVAILABLE		

FIRE EXTINGUISHER (CABINET)



12-114

Model No.	W×H×D(mm)	SPECIFICATION
12-114	295×155×160	2kg Fire Extinguisher
OEM AVAILABLE		



12-115

Model No.	W×H×D(mm)	SPECIFICATION
12-115	700×400×230	2pcs 9kg Fire Extinguisher
OEM AVAILABLE		



12-116

Model No.	W×H×D(mm)	SPECIFICATION
12-116	750×460×250	2pcs 9kg Fire Extinguisher
OEM AVAILABLE		



12-117

Model No.	W×H×D(mm)	SPECIFICATION
12-117	400×250×400	2pcs 9kg Fire Extinguisher
OEM AVAILABLE		

FIRE HOSE REEL (CABINET)



12-021

Model No.	W×H×D(mm)	HOSE SPECIFICATION
12-021	750×750×250	19mm×25/30m 25m×25/30
OEM AVAILABLE		



12-022

Model No.	W×H×D(mm)	HOSE SPECIFICATION
12-022	760×720×230	19mm×25/30m 25m×25/30
OEM AVAILABLE		



12-023

Model No.	W×H×D(mm)	HOSE SPECIFICATION
12-023	600×600×210	19mm×25/30m
OEM AVAILABLE		



12-024

Model No.	W×H×D(mm)	HOSE SPECIFICATION
12-024	550×550×200	Layflat Hose Reel 1.5"×25/30m
OEM AVAILABLE		



12-025

Model No.	W×H×D(mm)	HOSE SPECIFICATION
12-025	800×800×300	19mm×25/30m 25m×25/30
OEM AVAILABLE		



12-026

Model No.	W×H×D(mm)	HOSE SPECIFICATION
12-026	780×780×280	19mm×25/30m 25m×25/30
OEM AVAILABLE		

FIRE HOSE REEL (CABINET)



12-027

Model No.	W×H×D(mm)	HOSE SPECIFICATION
12-027	800×800×350	19mm×25/30m 25mm×25/30
OEM AVAILABLE		



12-028

Model No.	W×H×D(mm)	HOSE SPECIFICATION
12-028	700×700×250	Layflat Hose Reel1.5"×25/30m
OEM AVAILABLE		



12-029

Model No.	W×H×D(mm)	HOSE SPECIFICATION
12-029	600×600×200	Layflat Hose Reel1.5"×25/30m
OEM AVAILABLE		



12-030

Model No.	W×H×D(mm)	HOSE SPECIFICATION
12-030	650×650×200	Layflat Hose Reel1.5"×25/30m
OEM AVAILABLE		



12-031

Model No.	W×H×D(mm)	HOSE SPECIFICATION
12-031	680×680×230	Layflat Hose Reel1.5"×20/25m
OEM AVAILABLE		



12-032

Model No.	W×H×D(mm)	HOSE SPECIFICATION
12-032	700×700×300	Layflat Hose Reel2.5"×25/30m
OEM AVAILABLE		

FIRE HOSE REEL (CABINET)



12-033

Model No.	W×H×D(mm)	HOSE SPECIFICATION
12-033	600×400×200	Layflat Hose Reel1.5"×25/30m
OEM AVAILABLE		



12-034

Model No.	W×H×D(mm)	HOSE SPECIFICATION
12-034	650×450×200	Layflat Hose Reel1.5"×25/30m
OEM AVAILABLE		



12-035

Model No.	W×H×D(mm)	HOSE SPECIFICATION
12-035	900×700×420	19mm×25/30m 25mm×25/30
OEM AVAILABLE		



12-036

Model No.	W×H×D(mm)	HOSE SPECIFICATION
12-036	750×720×250	Layflat Hose Reel2.5"×25/30m
OEM AVAILABLE		



12-037

Model No.	W×H×D(mm)	HOSE SPECIFICATION
12-037	800×800×180	Layflat Hose Reel2.5"×25/30m
OEM AVAILABLE		



12-038

Model No.	W×H×D(mm)	HOSE SPECIFICATION
12-038	1000×800×400	19mm×25/30m 25mm×25/30
OEM AVAILABLE		

FIRE HOSE REEL (CABINET)



12-039

Model No.	W×H×D(mm)	HOSE SPECIFICATION
12-039	1500×750×250	19mm×25/30m 25mm×25/30
OEM AVAILABLE		



12-040

Model No.	W×H×D(mm)	HOSE SPECIFICATION
12-040	720×720×250	19mm×25/30m 25mm×25/30
OEM AVAILABLE		



12-041

Model No.	W×H×D(mm)	HOSE SPECIFICATION
12-041	950×720×280	Layflat Hose Reel 2.5"×25/30m
OEM AVAILABLE		



12-042

Model No.	W×H×D(mm)	HOSE SPECIFICATION
12-042	750×1050×250	1pc Extinguisher&hose 25mm×25/30m
OEM AVAILABLE		



12-043

Model No.	W×H×D(mm)	HOSE SPECIFICATION
12-043	800×1050×300	1pc Extinguisher&hose 25mm×25/30m
OEM AVAILABLE		



12-043A

Model No.	W×H×D(mm)	HOSE SPECIFICATION
12-043A	800×1050×300	Stainless steel 25mm×25/30
OEM AVAILABLE		



12-044

Model No.	W×H×D(mm)	HOSE SPECIFICATION
12-044	760×760×260	Stainless steel 19mm×25/30
Stainless Steel		
OEM AVAILABLE		



12-044A

Model No.	W×H×D(mm)	HOSE SPECIFICATION
12-044A	750×1050×250	Stainless steel 25mm×25/30
Stainless Steel		
OEM AVAILABLE		



12-045

Model No.	W×H×D(mm)	HOSE SPECIFICATION
12-045	1500×750×250	Stainless steel 25mm×25/30
Stainless Steel		
OEM AVAILABLE		



12-046

Model No.	W×H×D(mm)	HOSE SPECIFICATION
12-046	650×650×250	Layflat Hose Reel 2.5"×25/30m
OEM AVAILABLE		



12-047

Model No.	W×H×D(mm)	SPECIFICATION
12-047	595×395×295	Recessed type
OEM AVAILABLE		



12-048

Model No.	W×H×D(mm)	SPECIFICATION
12-048	595×595×295	Recessed type
OEM AVAILABLE		

FIRE HOSE REEL (CABINET)

FIRE HOSE REEL (CABINET)



12-049

Model No.	W×H×D(mm)	HOSE SPECIFICATION
12-049	650×650×170	Layflat Hose Reel 2.5"×25/30m OEM AVAILABLE



12-050

Model No.	W×H×D(mm)	HOSE SPECIFICATION
12-050	500×500×200	Layflat Hose Reel 1.5"×25/30m OEM AVAILABLE



12-052

Model No.	W×H×D(mm)	SPECIFICATION
12-052	315×510×750	Fire emergency tool Box OEM AVAILABLE



12-049A

Model No.	W×H×D(mm)	HOSE SPECIFICATION
12-049A	400×600×160	Layflat Hose Reel 1.5"×25/30m
12-049B	400×600×160	Layflat Hose Reel 1.5"×25/30m OEM AVAILABLE



12-049B



12-051

Model No.	W×H×D(mm)	HOSE SPECIFICATION
12-051	650×650×250	Layflat Hose Reel 2.5"×25/30m Stainless Steel OEM AVAILABLE



Model No.	W×H×D(mm)	SPECIFICATION
12-053	910×690×600	Life Jacket Chests
12-053A	1250×700×803	Life Jacket Chests
12-053B	1500×1000×750	Life Jacket Chests
12-053C	1800×800×1080	Life Jacket Chests
12-054	300×285×595	EEBD Cabinet
12-054A	300×285×595	EEBD Cabinet



FIRE CABINET



12-071

Model No.	W×H×D(mm)	SPECIFICATION	Model No.	W×H×D(mm)	SPECIFICATION
12-071	385×310×150	LOG BOOKS	12-073	300×300×150	Fire Blanket
12-072	300×370×140	FMDK/K BOOKS	12-073A	400×400×205	Fire Blanket



12-072



12-073



12-073A



12-074



12-075



12-076



12-077

Model No.	W×H×D(mm)	SPECIFICATION	Model No.	W×H×D(mm)	SPECIFICATION
12-074	350×260×80	LOG BOOKS	12-076	400×400×200	Fire Blanket
12-075	350×260×80	Cabinet for documents	12-077	415×415×215	Fire Blanket



12-078



12-079



12-080

Model No.	W×H×D(mm)	SPECIFICATION	Model No.	W×H×D(mm)	SPECIFICATION
12-078	255×205×205	Kit cabinet	12-080	460×265×80	Sprinkler Cabinet 36pcs
12-079	260×180×80	Sprinkler Cabinet 12pcs	12-080A	350×180×80	Sprinkler Cabinet 24 purchase

FIRE CABINET



12-081



12-082



12-083



12-084

Model No.	W×H×D(mm)	SPECIFICATION	Model No.	W×H×D(mm)	SPECIFICATION
12-081		FIRE BOX	12-083		FIRE BOX
12-082		FIRE BOX	12-084	160×120×60	KEY BOX



12-085



12-086



12-087



12-088

Model No.	W×H×D(mm)	SPECIFICATION	Model No.	W×H×D(mm)	SPECIFICATION
12-085	165×140×80	HOSE REEL NOZZLE BOX	12-087		FIRE BOX
12-086		FIRE BOX	12-088	160×120×60	FIRE BOX



12-089



12-090



12-091

Model No.	W×H×D(mm)	SPECIFICATION	Model No.	W×H×D(mm)	SPECIFICATION
12-089		FIRE HOSE RACK	12-091		FIRE HOSE RACK 2PCS
12-090		FIRE HOSE RACK			



12-010



12-010



12-012



12-020

VALVE



15-30

瓶口螺纹/Inlet thread
PZ27.8×14
喷口螺纹/Outlet thread
φ21.4×14
吸管螺纹/Dip tube thread
M10×1



15-31

瓶口螺纹/Inlet thread
PZ27.8×14
喷口螺纹/Outlet thread
φ21.7×14
吸管螺纹/Dip tube thread
M10×1



15-32

瓶口螺纹/Inlet thread
PZ19.2×14
喷口螺纹/Outlet thread
φ21.7×14
吸管螺纹/Dip tube thread
M10×1



15-33

瓶口螺纹/Inlet thread
PZ19.2×14
喷口螺纹/Outlet thread
φ21.7×14
吸管螺纹/Dip tube thread
M10×1



15-34

瓶口螺纹/Inlet thread
PZ19.2×14
喷口螺纹/Outlet thread
φ21.7×14
吸管螺纹/Dip tube thread
M10×1



15-35

瓶口螺纹/Inlet thread
PZ27.8×14
喷口螺纹/Outlet thread
φ21.7×14
吸管螺纹/Dip tube thread
M10×1



15-36

瓶口螺纹/Inlet thread
PZ27.8×14
喷口螺纹/Outlet thread
φ21.7×14
吸管螺纹/Dip tube thread
M10×1



15-37

瓶口螺纹/Inlet thread
PZ27.8×14
喷口螺纹/Outlet thread
φ21.7×14
吸管螺纹/Dip tube thread
M10×1

VALVE



VALVE



VALVE



15-38

瓶口螺纹/Inlet thread
PZ27.8×14
喷口螺纹/Outlet thread
c21.7×14
吸管螺纹/Dip tube thread
M10×1



15-39

瓶口螺纹/Inlet thread
PZ27.8×14
喷口螺纹/Outlet thread
c21.7×14
吸管螺纹/Dip tube thread
M10×1



15-40

瓶口螺纹/Inlet thread
PZ27.8×14
喷口螺纹/Outlet thread
W21.8×14
吸管螺纹/Dip tube thread
M10×1



16-01

瓶口螺纹/Inlet thread
M30×1.5
喷口螺纹/Outlet thread
G1/8×28
吸管螺纹/Dip tube thread
M16×1.5



16-02

瓶口螺纹/Inlet thread
M24×1.5
喷口螺纹/Outlet thread
G1/4
吸管螺纹/Dip tube thread
M16×1.5



16-03

瓶口螺纹/Inlet thread
M30×1.5
喷口螺纹/Outlet thread
G1/4
吸管螺纹/Dip tube thread
M16×1.5



16-04

瓶口螺纹/Inlet thread
M30×1.5
喷口螺纹/Outlet thread
G1/8×28
吸管螺纹/Dip tube thread
M16×1.5



16-05

瓶口螺纹/Inlet thread
M30×1.5
喷口螺纹/Outlet thread
G1/4
吸管螺纹/Dip tube thread
M16×1.5

VALVE



16-06

瓶口螺纹/Inlet thread
M30×1.5
喷口螺纹/Outlet thread
G1/8×28
吸管螺纹/Dip tube thread
M16×1



16-07

瓶口螺纹/Inlet thread
M30×1.5
喷口螺纹/Outlet thread
M16×1.5
吸管螺纹/Dip tube thread
M16×1.5



16-08

瓶口螺纹/Inlet thread
M30×1.5
喷口螺纹/Outlet thread
M12×1
吸管螺纹/Dip tube thread
M16×1.5



16-09

瓶口螺纹/Inlet thread
M30×1.5
喷口螺纹/Outlet thread
M12×1.5
吸管螺纹/Dip tube thread
M14×1.5



16-10

瓶口螺纹/Inlet thread
M30×1.5
喷口螺纹/Outlet thread
G1/4
吸管螺纹/Dip tube thread
M16×1.5



16-11

瓶口螺纹/Inlet thread
M30×1.5
喷口螺纹/Outlet thread
M12×1.5/G1/8
吸管螺纹/Dip tube thread
M16×1.5



16-12

瓶口螺纹/Inlet thread
M30×1.5
喷口螺纹/Outlet thread
M14×1.5
吸管螺纹/Dip tube thread
M14×1.5



16-13

瓶口螺纹/Inlet thread
M30×1.5
喷口螺纹/Outlet thread
G1/4
吸管螺纹/Dip tube thread
M16×1.5

VALVE



16-33

瓶口螺纹/Inlet thread
M25 × 1.5
喷口螺纹/Outlet thread
M12 × 1.5
吸管螺纹/Dip tube thread
M18 × 1.5



16-34

瓶口螺纹/Inlet thread
M30 × 1.5
喷口螺纹/Outlet thread
M16 × 1.5
吸管螺纹/Dip tube thread
M16 × 1.5



16-35

瓶口螺纹/Inlet thread
M30 × 1.5
喷口螺纹/Outlet thread
M14 × 1.5
吸管螺纹/Dip tube thread
M16 × 1.5



16-37

瓶口螺纹/Inlet thread
M30 × 1.5
喷口螺纹/Outlet thread
Pg9
吸管螺纹/Dip tube thread
M20 × 1.5



16-38

瓶口螺纹/Inlet thread
M30 × 1.5
喷口螺纹/Outlet thread
M14 × 1.25
吸管螺纹/Dip tube thread
M22 × 1.5



16-39

瓶口螺纹/Inlet thread
M30 × 1.5
喷口螺纹/Outlet thread
M14 × 1.25
吸管螺纹/Dip tube thread
M22 × 1.5



16-40

瓶口螺纹/Inlet thread
M30 × 1.5
喷口螺纹/Outlet thread
M14 × 1.5
吸管螺纹/Dip tube thread
M16 × 1.5

DRY POWDER AUTOMATIC (HANGING) FIRE EXTINGUISHER CYLINDER



Catalogue Model	2KG	2.5KG	3KG	4KG	6KG
Product Code	20-C2KG	20-C2.5KG	20-C3KG	20-C4KG	20-C6KG
Cylinder High-Approx(mm)	150	165	175	225	225
Cylinder Shell-Approx Dia(mm)	φ184	φ245	φ245	φ245	φ270
Weight (cylinder): KG	1.25	1.4	1.7	1.9	2
Test Pressure(bar)	25 bar				
Working Pressure(bar)	14 bar				
Temperature Range °C	-30°C/+60°C				
Cylinder Material	ST12/DC01/SPCC				
Carton Size(cm)	38*38*17	51*26*19	51*26*20	51*26*24	56*29*25
Quantity /Per Carton	4PCS	2PCS	2PCS	2PCS	2PCS
Gross Weight (cylinder):KG	5.5	3.5	4	4.5	4.7

Catalogue Model	8KG	10KG	12KG	14KG	16KG	20KG
Product Code	20-C8KG	20-C10KG	20-C12KG	20-C14KG	20-C16KG	20-C20KG
Cylinder High-Approx(mm)	245	270	265	295	310	335
Cylinder Shell-Approx Dia(mm)	φ300	φ300	φ350	φ350	φ350	φ350
Weight (cylinder): KG	3.1	3.6	4.2	4.8	5.8	6.2
Test Pressure(bar)	25 bar					
Working Pressure(bar)	14 bar					
Temperature Range °C	-30°C/+60°C					
Cylinder Material	ST12/DC01/SPCC					
Carton Size(cm)	62*32*27	62*32*29	72*37*29	72*37*32	72*37*33	72*37*35
Quantity /Per Carton	2PCS	2PCS	2PCS	2PCS	2PCS	1PCS
Gross Weight (cylinder):KG	6.5	8	9	10	12	7

DRY POWDER AUTOMATIC (HANGING) FIRE EXTINGUISHER



Catalogue Model	2KG	2.5KG	3KG	4KG	6KG
Product Code	20-XG2KG	20-XG2.5KG	20-XG3KG	20-XG4KG	20-XG6KG
Cylinder High-Approx(mm)	150	165	175	225	225
Cylinder Shell-Approx Dia(mm)	φ184	φ245	φ245	φ245	φ270
Weight (cylinder): KG	1.25	1.4	1.7	1.9	2
Dry Powder Weight:KG	2	2.5	3	4	6
Extinguisher Weight:KG	3.45	4.1	4.9	6.1	8.2
Test Pressure(bar)	25 bar				
Working Pressure(bar)	14 bar				
Temperature Range °C	-30°C/+60°C				
Cylinder Material	ST12/DC01/SPCC				
Carton Size(cm)	20*20*21	27*27*26	27*27*27	27*27*32	29*29*33
Quantity /Per Carton	1PCS	1PCS	1PCS	1PCS	1PCS
Gross Weight (cylinder):KG	4	4.5	5.5	6.5	9

Catalogue Model	8KG	10KG	12KG	14KG	16KG	20KG
Product Code	20-XG8KG	20-XG10KG	20-XG12KG	20-XG14KG	20-XG16KG	20-XG20KG
Cylinder High-Approx(mm)	245	270	265	295	310	335
Cylinder Shell-Approx Dia(mm)	φ300	φ300	φ350	φ350	φ350	φ350
Weight (cylinder): KG	3.1	3.6	4.2	4.8	5.8	6.2
Dry Powder Weight:KG	8	10	12	14	16	20
Extinguisher Weight:KG	11.3	13.8	16.4	19	22	26.4
Test Pressure(bar)	25 bar					
Working Pressure(bar)	14 bar					
Temperature Range °C	-30°C/+60°C					
Cylinder Material	ST12/DC01/SPCC					
Carton Size(cm)	32*32*35	32*32*37	37*37*38	37*37*41	37*37*44	37*37*47.5
Quantity /Per Carton	1PCS	1PCS	1PCS	1PCS	1PCS	1PCS
Gross Weight (cylinder):KG	12	14.5	17	19.5	22.5	27

DRY POWDER FIRE EXTINGUISHER (FOOT RING BASE)



DEEP DRAWING WITH FOOT RING PRODUCT SPECIFICATION

CATALOGUE Model	1KG	2KG	3KG	4KG	5KG	6KG	8KG	9KG
Product Code	21-1	21-2	21-3	21-4	21-5	21-6	21-8	21-9
High-Approx(mm)	245	380	420	470	510	550	545	570
Shell-Approx Dia(mm)	90	110	130	130	145	150	160	175
Capacity(L)	1.2	2.4	3.6	4.8	5.9	7.1	9.5	10.6
Weight Full-Approx(kg)	2	3.5	5	6.4	7.6	9	11.8	12.8
Discharge time-Approx(s)	≥8s	≥8s	≥13s	≥13s	≥13s	≥13s	≥13s	≥13s
Test Pressure(MPa)	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5
Working Pressure at 20°C (MPa)	1.2	1.2	1.2	1.4	1.4	1.4	1.4	1.4
Temperature Range	-30°C/+60°C	-30°C/+60°C	-30°C/+60°C	-30°C/+60°C	-30°C/+60°C	-30°C/+60°C	-30°C/+60°C	-30°C/+60°C

DRY POWDER FIRE EXTINGUISHER (TRIPOD BASE)



CE 0036



EN3

CE0036 DEEP DRAWING PRODUCT SPECIFICATION

CATALOGUE Model	1KG	2KG	3KG	4KG	6KG	6KG	9KG	12KG
Product Code	22A-1	22A-2	22A-3	22A-4	22A-6	22A-6	22A-9	22A-12
High-Approx(mm)	272	314	345	412	472	425	505	582
Shell-Approx Dia(mm)	85	110	130	130	150	160	182	190
Capacity(L)	1.12-1.25	2.25-2.5	3.37-3.75	4.5-5	6.74-7.5	6.74-7.5	10.11-11.25	13.48-15
Weight Full-Approx(kg)	2.2	4	5.6	7	9.4	9.8	13.7	18
Discharge time-Approx(s)	6	9	9	9	15	15	15	18
Test Pressure(MPa)	27	27	27	27	27	27	27	27
Working Pressure at 20°C (MPa)	14	14	14	14	14	14	14	14
Fire Rating (EN615 ABC)	8A/34B/C	13A/89B/C	21A/113B/C	27A/144B/C	34A/233B/C	43A/233B/C	55A/233B/C	55A/233B/C
Temperature Range	-30°C/+60°C	-30°C/+60°C	-30°C/+60°C	-30°C/+60°C	-30°C/+60°C	-30°C/+60°C	-30°C/+60°C	-30°C/+60°C

DRY POWDER FIRE EXTINGUISHER (TRIPOD BASE)



CE0036 THREE PIECE WELDING PRODUCT SPECIFICATION

CATALOGUE Model	1KG	2KG	3KG	4KG	6KG	6KG	9KG	12KG
Product Code	22-1	22-2	22-3	22-4	22-5	22-6	22-9	22-12
High-Approx(mm)	239	310	440	366	480	430	490	621
Shell-Approx Dia(mm)	89	110	110	150	150	160	185	185
Capacity(L)	1.12-1.25	2.25-2.5	3.37-3.75	4.5-5	6.74-7.5	6.74-7.5	10.11-11.25	13.48-15
Weight Full-Approx(kg)	2.1	3.9	5.3	6.7	9.5	9.8	14.4	18.3
Discharge time-Approx(s)	6	9	9	9	15	15	15	18
Test Pressure(bar)	27	27	27	27	27	27	27	27
Working Pressure at 20°C (bar)	14	14	14	14	14	14	14	14
Fire Rating (EN615 ABC)	8A/34B/C	13A/89B/C	21A/113B/C	27A/144B/C	34A/233B/C	43A/233B/C	55A/233B/C	55A/233B/C
Temperature Range	-30°C/+60°C	-30°C/+60°C	-30°C/+60°C	-30°C/+60°C	-30°C/+60°C	-30°C/+60°C	-30°C/+60°C	-30°C/+60°C

6L, 9L FOAM & 9L WATER FIRE EXTINGUISHER



CE 0036



EN3



CE0036 FOAM & WATER PRODUCT SPECIFICATION

CATALOGUE Model	6L-FOAM	6L-FOAM	9L-FOAM	9L-WATER
Product Code	23-F150	23-F160	23-F182	23-W182
High-Approx(mm)	470	425	505	505
Shell-Approx Dia(mm)	150	160	182	182
Capacity(L)	6.74-7.5	6.74-7.5	10.11-11.25	10.11-11.25
Weight Full-Approx(kg)	10.4	10.4	14.6	14.6
Discharge time-Approx(s)	15	15	15	15
Test Pressure(bar)	27	27	27	27
Working Pressure at 20°C (bar)	12	12	12	12
Fire Rating	13A/144B	13A/144B	21A/183B	13A
Temperature Range	-30°C/+60°C	-30°C/+60°C	-30°C/+60°C	-30°C/+60°C



CARBON STEEL CO2 FIRE EXTINGUISHER



TYPE	2kg	2.3kg	3kg	4.5kg	5kg	6.8kg	7kg	9kg	2kg	3kg	5kg
Product Code	24-1	24-2	24-3	24-4	24-5	24-6	24-7	24-8	24-9	24-10	24-11
Out-diameter(mm)	φ114	φ114	φ133	φ152	φ152	φ159	φ159	φ159	φ108	φ140	φ140
Volume(L)	3	3.45	4.5	6.75	7.5	10.2	10.5	13.5	2.9	4.3	7.2
Cylinder length(mm)	431	483	460	527	576	751	771	880	455	405	615
Cylinder weight(mm)	5.58	6.3	8.0	11.78	12.77	16.3	16.71	22.2	5.0	7.2	10.5
Working Pressure(bar)	174	174	174	174	174	174	174	174	150	150	150
Test Pressure(bar)	250	250	250	250	250	250	250	250	250	250	250
Min wall-thickness(mm)	4.5	4.5	5.0	5.6	5.6	6.3	6.3	6.3	3.8	4.5	4.5

CE0036 34CrMo4 CO2 FIRE EXTINGUISHER



TYPE	2kg(A)	2kg(B)	2.3kg(A)	2.3kg(B)	3kg(A)	3kg(B)	4.5kg(A)	4.5kg(B)	5kg(A)	5kg(B)	6.8kg(A)	6.8kg(B)	7kg(A)	7kg(B)	10kg(A)	10kg(B)
Product Code	25-1	25-2	25-3	25-4	25-5	25-6	25-7	25-8	25-9	25-10	25-11	25-12	25-13	25-14	25-15	25-16
Out-diameter(mm)	φ104 φ116	φ104 φ116	φ116	φ116	φ116	φ116	φ136	φ136	φ136	φ136	φ154	φ154	φ154	φ154	φ154	φ154
Volume(L)	3	2.67	3.45	3.1	4.5	4.0	6.75	6	7.5	6.7	10.2	9.1	10.5	9.35	15	13.4
Cylinder length(mm)	475 384	430 350	431	392	540	488	590	533	647	584	68	613	698	630	9.63	875
Cylinder weight(mm)	3.75 3.60	3.70 3.69	3.96	4.05	4.79	4.91	7.1	7.5	7.66	8.11	10.41	11.02	10.63	11.28	13.96	15.1
Working Pressure(bar)	174	215	174	215	174	215	174	215	174	215	174	215	174	215	174	215
Test Pressure(bar)	250	315	250	315	250	315	250	315	250	315	250	315	250	315	250	315
Min wall-thickness(mm)	2.29 2.38	2.55 2.58	2.38	2.58	2.38	2.58	2.78	3.01	2.78	3.01	3.14	3.40	3.14	3.40	3.14	3.40

Model(A) filling ratio k=0.67 Model(B) filling ratio k=0.75
Temperature range:-30°C ~ +60°C

WHEELED FIRE EXTINGUISHER



CE 0036

CATALOGUE Model	25KG	30KG	35KG	50KG	75KG	100KG
Product Code	26-250	26-310	26-310	26-310	26-400	26-400
High-Approx(mm)	660	560	640	890	810	1050
Shell-Approx Dia(mm)	250	310	310	310	400	400
Capacity(L)	29.5	35.5	41	59.5	89	118
Weight Full-Approx(kg)	56	62	72	95	138	160
Discharge time-Approx(s)	30	35	38	50	52	58
Test Pressure(bar)	27	27	27	27	27	27
Working Pressure at 20°C (bar)	14	14	14	14	14	14
Temperature Range	-30°C/+60°C	-30°C/+60°C	-30°C/+60°C	-30°C/+60°C	-30°C/+60°C	-30°C/+60°C



WHEELED FIRE EXTINGUISHER



Product Code	Type	Out-diameter	Cylinder height	Drypowderweight	Tempoeraturerange	Maxwork pressure	Testpressure	Carton size
27-1	20kg	219mm	1160mm	20kg	-30-55℃	150Bar	225Bar	102×48×122cm
27-2	25kg	219mm	1330mm	25kg	-30-55℃	150Bar	225Bar	102×48×122cm
27-3	30kg	232mm	1370mm	30kg	-30-55℃	150Bar	225Bar	118×55×124cm
27-4	50kg	219mm	1330mm	50kg	-30-55℃	150Bar	225Bar	123×62×132cm

HOSE&HORN



18-01

连接螺纹/connection thread M16×1.5
长度/Length 450mm



18-04

连接螺纹/connection thread M16×1.5
长度/Length 660mm



18-06

连接螺纹/connection thread M16×1.5
长度/Length 680mm



18-09

连接螺纹/connection thread M14×1.25
长度/Length 620mm



18-12

连接螺纹/connection thread M14×1.25
长度/Length 620mm



18-15

连接螺纹/connection thread M16×1.5
长度/Length 520mm



18-03

连接螺纹/connection thread M14×1.25
长度/Length 550mm



18-05

连接螺纹/connection thread 21.8/14牙
长度/Length 1m



18-08

连接螺纹/connection thread M16×1.5
长度/Length 580mm



18-10

连接螺纹/connection thread M16×1.5
长度/Length 720mm



18-13

连接螺纹/connection thread M16×1.5
长度/Length 520mm



18-16

连接螺纹/connection thread 27×1.5
长度/Length 5m



18-02

连接螺纹/connection thread M16 x 1.5
长度/Length 450mm



18-07

连接螺纹/connection thread M14 x 1.5
长度/Length 550mm



18-014

连接螺纹/connection thread M16 x 1.5
长度/Length 460mm



18-011

连接螺纹/connection thread M14 x 1.5
长度/Length 460mm




18-18

连接螺纹/connection thread G1/4-14
长度/Length 260mm



18-24

连接螺纹/connection thread 1/2
长度/Length 290mm



挂钩
WALL BRACKETS
19-007



挂具
BRACKETS
19-010

CO2喷管 CO2 HOSE & HORN



18-25

1KG, 2KG



18-26

1KG, 2KG



18-30

2.3KG



18-28

5KG, 7KG, 9KG



18-29

1KG, 2KG



18-31

5KG, 7KG



18-27

4KG, 5KG



18-32

25KG, 50KG

GAUGE



28-01



28-02



28-03



28-04



28-05



28-06



28-07



28-08



28-09



28-10



28-11



28-12



28-13



28-14



28-15



28-16



0.8X0.8M 1.0X1.0M 1.2X1.2M 1.8X1.8M



C



D

8W 220-240V 3HOURS 3.6V NI-CD

OTHERS



A



B



C



D



E



F



G



H



I



J



K



L



M



N



O



P



Q



R



S



T



U